

(43) Date of A Publication 24.03.1999

(21) Application No 9820013.2

(22) Date of Filing 14.09.1998

(30) Priority Data

(31) 09255550 (32) 19.09.1997 (33) JP

(71) Applicant(s)

Sony Corporation
(Incorporated in Japan)
7-35 Kitashinagawa 6-chome, Shinagawa-ku, Tokyo,
Japan

(72) Inventor(s)

Tomohiro Koyata
Yoshiyuki Takaku
Motohiko Akiyama
Hiroshi Yamaguchi
Shinji Isozaki
Mizuno Hiroshi

(74) Agent and/or Address for Service

J A Kemp & Co.
14 South Square, Gray's Inn, LONDON, WC1R 5LX,
United Kingdom

(51) INT CL⁶

G11B 27/32, G06F 17/28, G08C 17/00

(52) UK CL (Edition Q)

G5R RB265 RHE RHX

G4H HF HRBE HRCE H1A H13D H14A H14D

(56) Documents Cited

GB 2295474 A GB 2226902 A GB 2180973 A
GB 2131583 A EP 0651383 A1 EP 0606157 A2
EP 0595358 A2 EP 0262954 A2 WO 95/12276 A1
US 5666451 A

(58) Field of Search


UK CL (Edition P) G4H HF HRBE, G5R RB25 RB81
RHD RHE RHX RJB
INT CL⁶ G11B 27/32
ONLINE: WPI JAPIO

(54) Abstract Title

Utoc program titles recording and reproducing

(57) Disclosed is a recording/reproducing apparatus for recording/reproducing a digital audio signal to/from a magneto-optical disk. Character information such as titles of individual programs or of the disk can be input in a plurality of character formats and recorded on the disk in a table of contents. Programs can be accessed by name in any language. Automatic conversion of titles between languages can be made. A remote control unit may be used to input and convert character data.

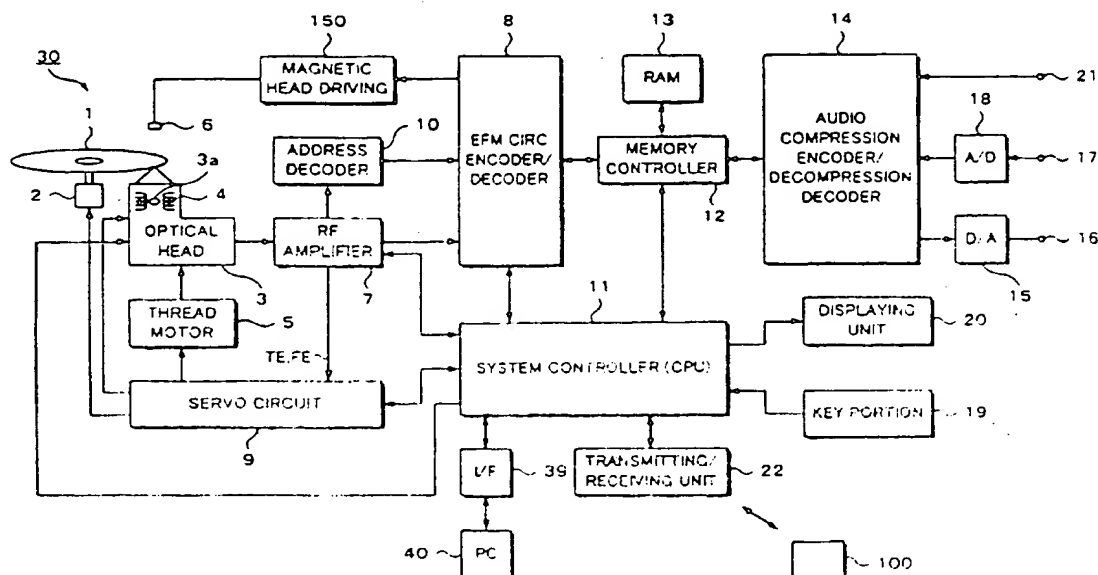Fig. 1



Best Available Copy

GB 2 329 509 A

Fig. 1

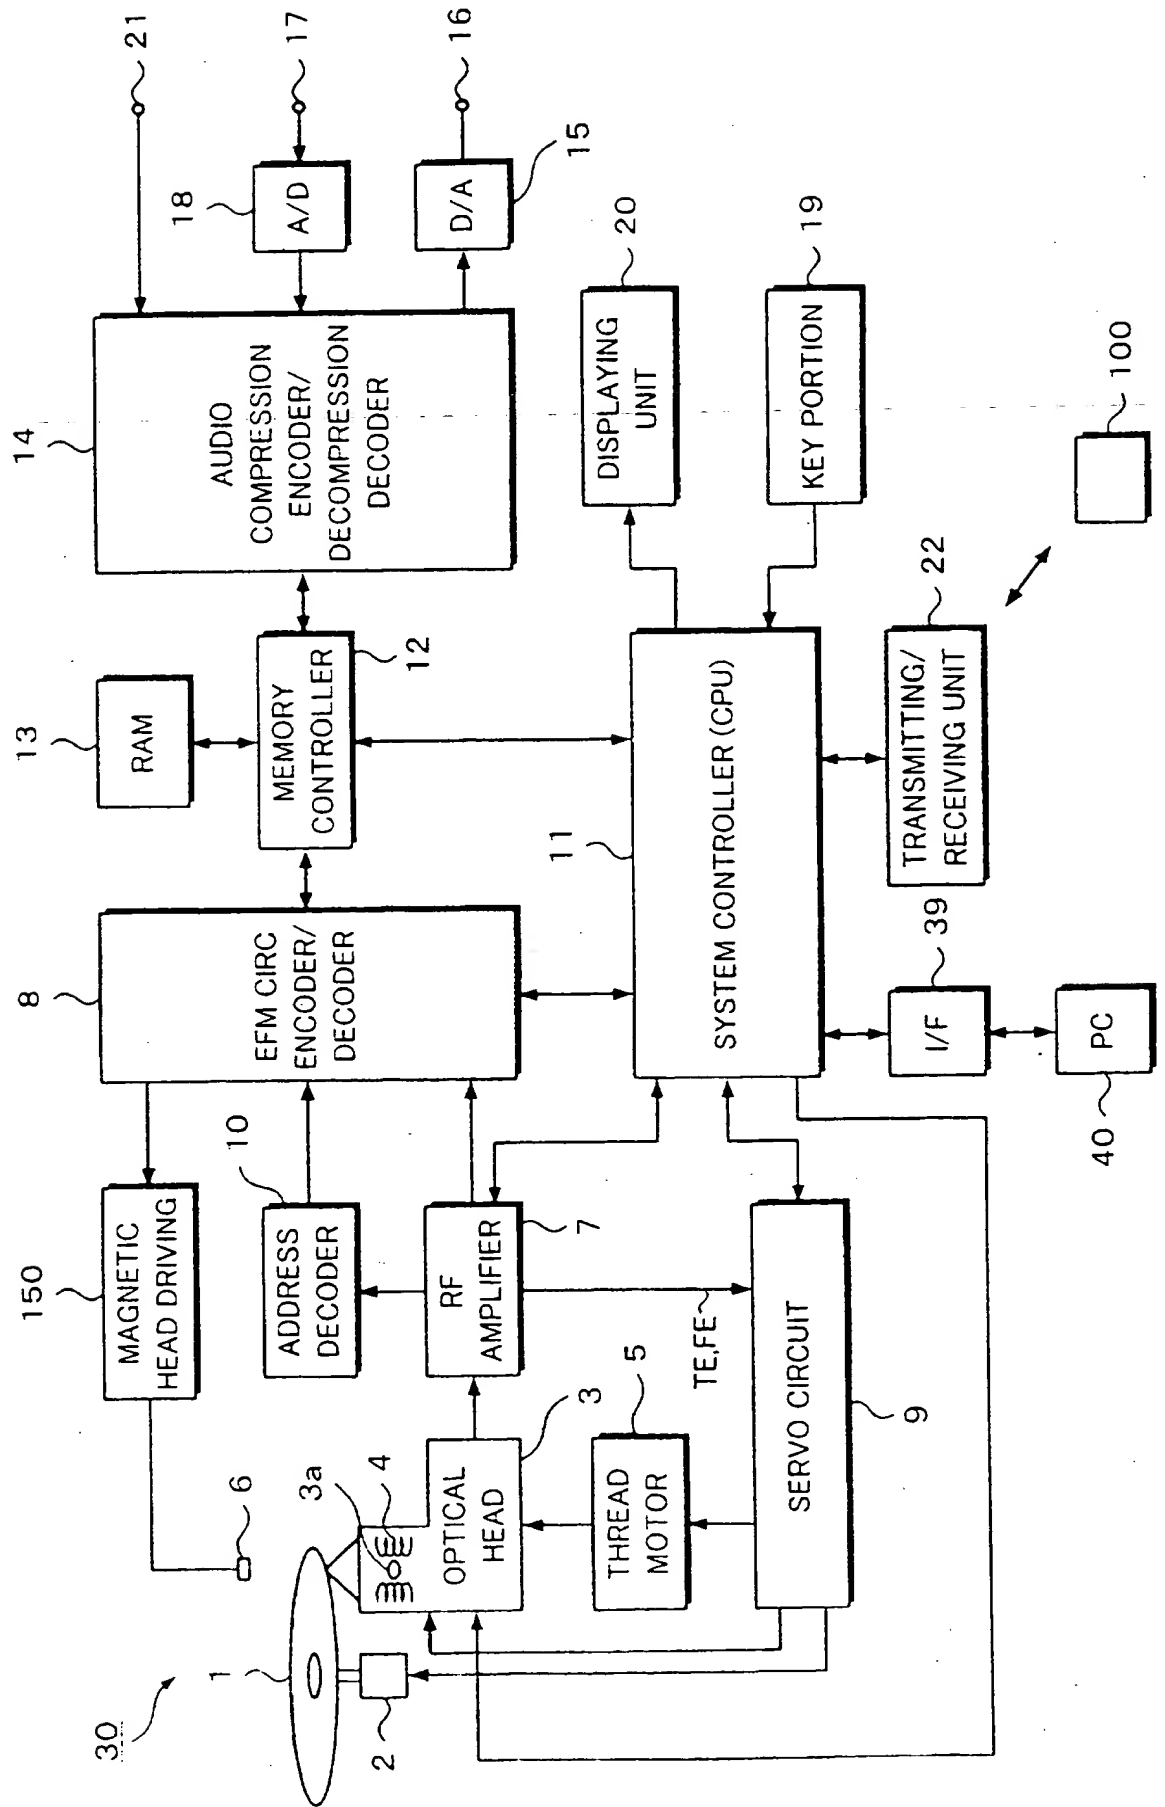


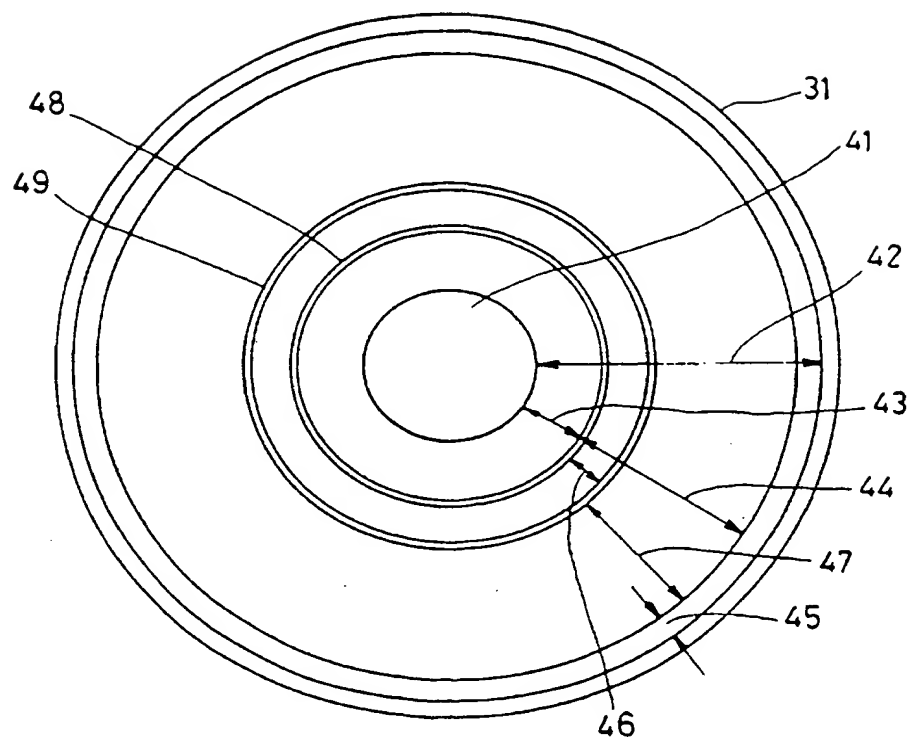
Fig. 2


Fig. 3

	16 bits				16 bits			
	MSB	LSB	MSB	LSB	MSB	LSB	MSB	LSB
0	00000000		11111111		11111111		11111111	
1	11111111		11111111		11111111		11111111	
2	11111111		11111111		11111111		00000000	
3	cluster H		cluster L		00000000		00000010	
4	00000000		00000000		00000000		00000000	
5	00000000		00000000		00000000		00000000	
6	00000000		00000000		00000000		00000000	
7	Maker code		Model code		First TNO		Last TNO	
8	00000000		00000000		00000000		Used Sectors	
9	00000000		00000000		00000000		00000000	
10	00000000		00000000		00000000		Disc Serial No.	
11	Disc		ID		P-DFA		P-EMPTY	
12	P-FRA		P-TNO1		P-TNO2		P-TNO3	
13	P-TNO4		P-TNO5		P-TNO6		P-TNO7	
74	P-TNO248		P-TNO249		P-TNO250		P-TNO251	
75	P-TNO252		P-TNO253		P-TNO254		P-TNO255	
76	00000000		00000000		00000000		00000000	
77	00000000		00000000		00000000		00000000	
78	START ADDRESS						TRACK MODE	
79	END ADDRESS						LINK INFO	
80	START ADDRESS						TRACK MODE	
81	END ADDRESS						LINK INFO	
82	START ADDRESS						TRACK MODE	
83	END ADDRESS						LINK INFO	
580	START ADDRESS						TRACK MODE	
581	END ADDRESS						LINK INFO	
582	START ADDRESS						TRACK MODE	
583	END ADDRESS						LINK INFO	
584	START ADDRESS						TRACK MODE	
585	END ADDRESS						LINK INFO	
586	START ADDRESS						TRACK MODE	
587	END ADDRESS						LINK INFO	

4/16

Fig. 4

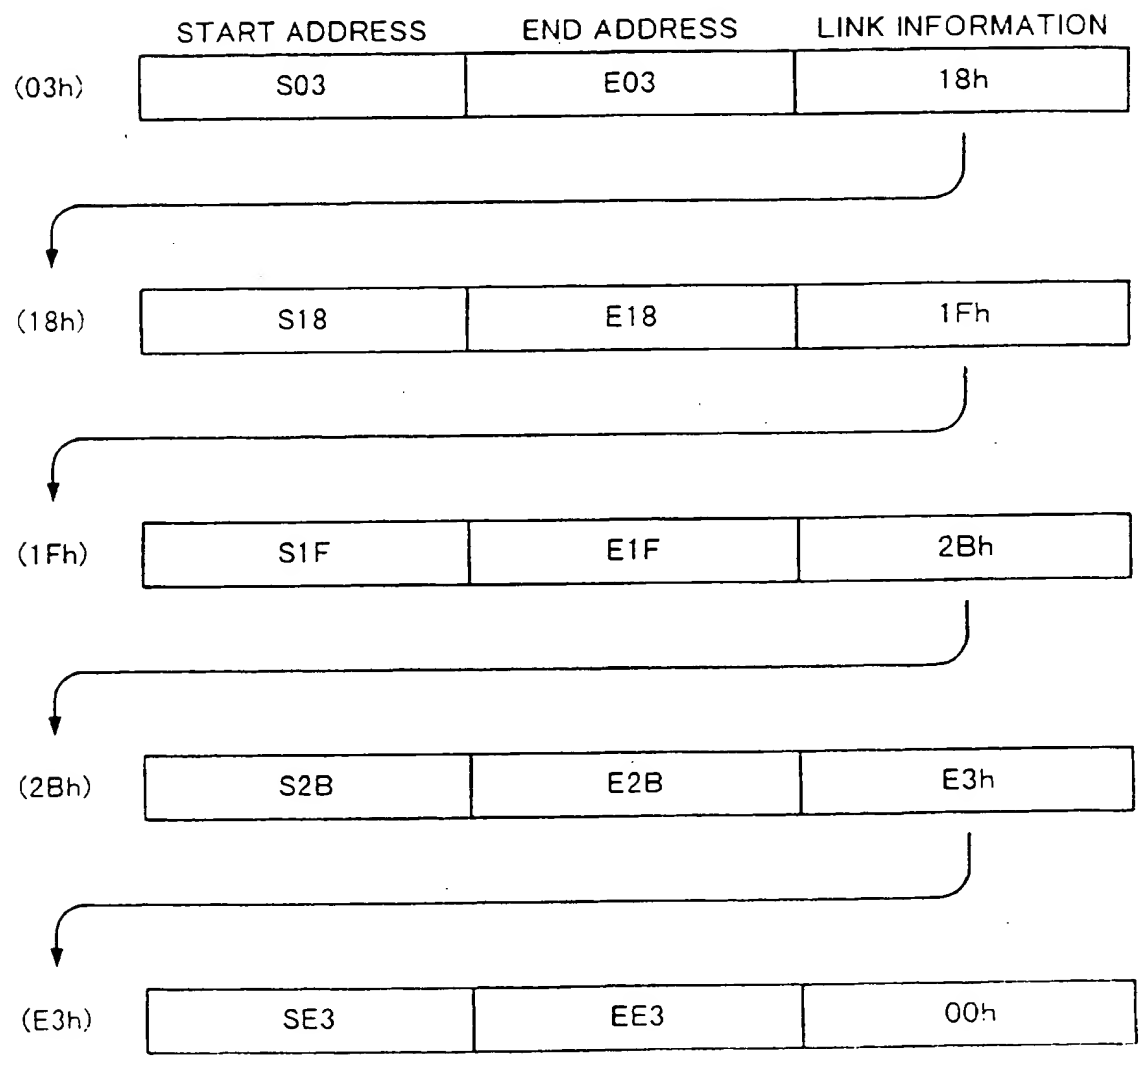P-FRA = 03h



5/16

Fig. 5

	16 bits				16 bits			
	MSB	LSB	MSB	LSB	MSB	LSB	MSB	LSB
0	00000000		11111111		11111111		11111111	
1	11111111		11111111		11111111		11111111	
2	11111111		11111111		11111111		00000000	
3	cluster H		cluster L		00000001		00000010	
4	00000000		00000000		00000000		00000000	
5	00000000		00000000		00000000		00000000	
6	00000000		00000000		00000000		00000000	
7	00000000		00000000		00000000		00000000	
8	00000000		00000000		00000000		00000000	
9	00000000		00000000		00000000		00000000	
10	00000000		00000000		00000000		00000000	
11	00000000		00000000		00000000		P-EMPTY	
12	00000000		P-TNA1		P-TNA2		P-TNA3	
13	P-TNA4		P-TNA5		P-TNA6		P-TNA7	
74	P-TNA248		P-TNA249		P-TNA250		P-TNA251	
75	P-TNA252		P-TNA253		P-TNA254		P-TNA255	
76	DISC NAME							
77	DISC NAME						LINK INFO	
78	DISC NAME/TRACK NAME							
79	DISC NAME/TRACK NAME						LINK INFO	
80	DISC NAME/TRACK NAME							
81	DISC NAME/TRACK NAME						LINK INFO	
82	DISC NAME/TRACK NAME							
83	DISC NAME/TRACK NAME						LINK INFO	
584	DISC NAME/TRACK NAME							
585	DISC NAME/TRACK NAME						LINK INFO	
586	DISC NAME/TRACK NAME							
587	DISC NAME/TRACK NAME						LINK INFO	

6/16

Fig. 6

	16 bits				16 bits			
	MSB	LSB	MSB	LSB	MSB	LSB	MSB	LSB
0	00000000	11111111	11111111	11111111	11111111	11111111	11111111	11111111
1	11111111	11111111	11111111	11111111	11111111	11111111	11111111	11111111
2	11111111	11111111	11111111	11111111	11111111	11111111	00000000	00000000
3	cluster H	cluster L	cluster L	cluster L	00000000	00000000	00000000	00000000
4	00000000	00000000	00000000	00000000	00000000	00000000	00000000	00000000
5	00000000	00000000	00000000	00000000	00000000	00000000	00000000	00000000
6	00000000	00000000	00000000	00000000	00000000	00000000	00000000	00000000
7	00000000	00000000	00000000	00000000	00000000	00000000	00000000	00000000
8	00000000	00000000	00000000	00000000	00000000	00000000	00000000	00000000
9	00000000	00000000	00000000	00000000	00000000	00000000	00000000	00000000
10	00000000	00000000	00000000	00000000	00000000	00000000	00000000	00000000
11	00000000	00000000	00000000	00000000	00000000	00000000	P-EMPTY	P-EMPTY
12	00000000	P-TRD1	P-TRD1	P-TRD1	P-TRD2	P-TRD2	P-TRD3	P-TRD3
13	P-TRD4	P-TRD5	P-TRD5	P-TRD5	P-TRD6	P-TRD6	P-TRD7	P-TRD7
14	P-TRD8	P-TRD9	P-TRD9	P-TRD9	P-TRD10	P-TRD10	P-TRD11	P-TRD11
15	P-TRD12	P-TRD13	P-TRD13	P-TRD13	P-TRD14	P-TRD14	P-TRD15	P-TRD15
16	P-TRD16							
17								
73								
74	P-TRD248	P-TRD249	P-TRD249	P-TRD249	P-TRD250	P-TRD250	P-TRD251	P-TRD251
75	P-TRD252	P-TRD253	P-TRD253	P-TRD253	P-TRD254	P-TRD254	P-TRD255	P-TRD255
76	RECORD DATE/TIME							
77					MAKER CODE	MAKER CODE	MODEL CODE	MODEL CODE
78	RECORD DATE/TIME							
79					MAKER CODE	MAKER CODE	MODEL CODE	MODEL CODE
80	RECORD DATE/TIME							
81					MAKER CODE	MAKER CODE	MODEL CODE	MODEL CODE
82	RECORD DATE/TIME							
83					MAKER CODE	MAKER CODE	MODEL CODE	MODEL CODE
84	RECORD DATE/TIME							
85							LINK INFO	LINK INFO
86								
586								
587								
							LINK INFO	LINK INFO

7/16
Fig. 7

	16 bits				16 bits			
	MSB	LSB	MSB	LSB	MSB	LSB	MSB	LSB
0	00000000		11111111		11111111		11111111	
1	11111111		11111111		11111111		11111111	
2	11111111		11111111		11111111		00000000	
3	cluster H		cluster L		00000000		00000000	
4	00000000		00000000		00000000		00000000	
5	00000000		00000000		00000000		00000000	
6	00000000		00000000		00000000		00000000	
7	00000000		00000000		00000000		00000000	
8	00000000		00000000		00000000		00000000	
9	00000000		00000000		00000000		00000000	
10	00000000		00000000		00000000		00000000	
11	00000000		00000000		00000000		P-EMPTY	
12	00000000		P-TNA1		P-TNA2		P-TNA3	
13	P-TNA4		P-TNA5		P-TNA6		P-TNA7	
14	P-TNA8		P-TNA9		P-TNA10		P-TNA11	
15	P-TNA12		P-TNA13		P-TNA14		P-TNA15	
16	P-TNA16							
17								
74	P-TNA248		P-TNA249		P-TNA250		P-TNA251	
75	P-TNA252		P-TNA253		P-TNA254		P-TNA255	
76	DISC NAME							
77	DISC NAME						LINK INFO	
78	DISC NAME OR TRACK NAME							
79	DISC NAME OR TRACK NAME						LINK INFO	
80	DISC NAME OR TRACK NAME							
81	DISC NAME OR TRACK NAME						LINK INFO	
82	DISC NAME OR TRACK NAME							
83	DISC NAME OR TRACK NAME						LINK INFO	
84	DISC NAME OR TRACK NAME							
85	DISC NAME OR TRACK NAME						LINK INFO	
86								
586	DISC NAME OR TRACK NAME							
587	DISC NAME OR TRACK NAME						LINK INFO	

8/16

Fig. 8A


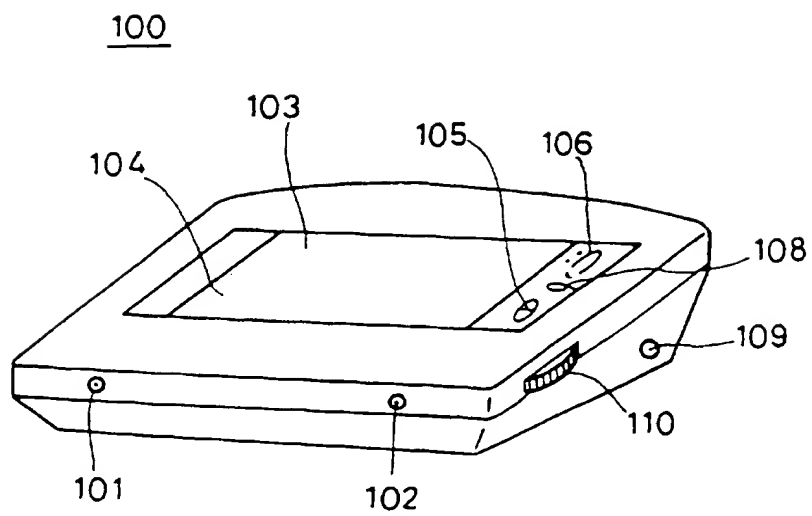


Fig. 8B

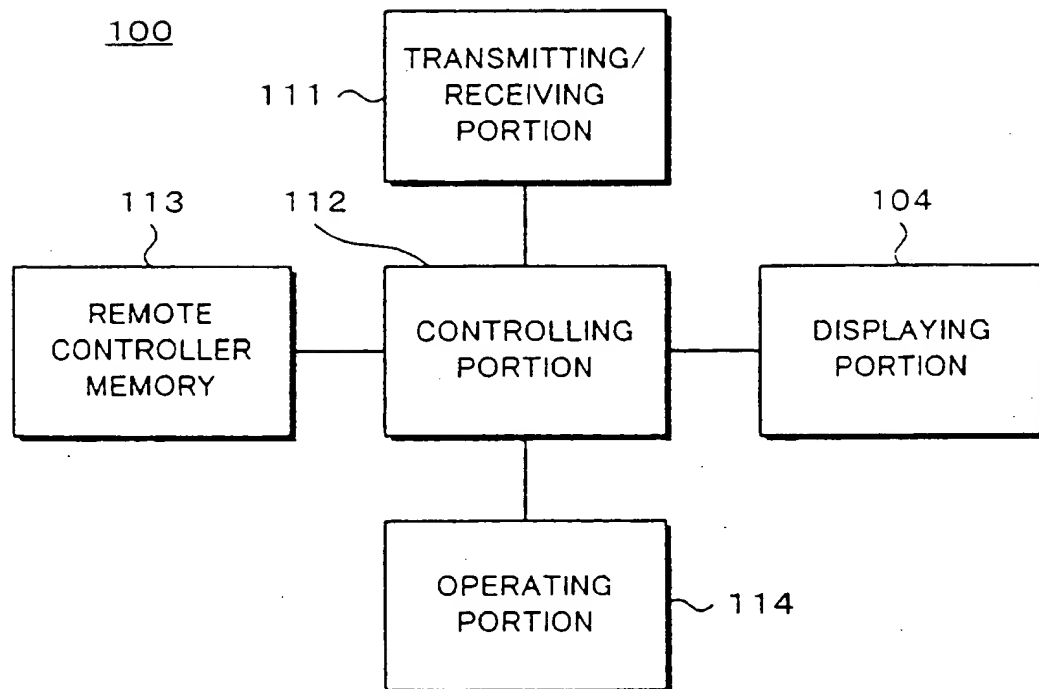

10/16
Fig. 9


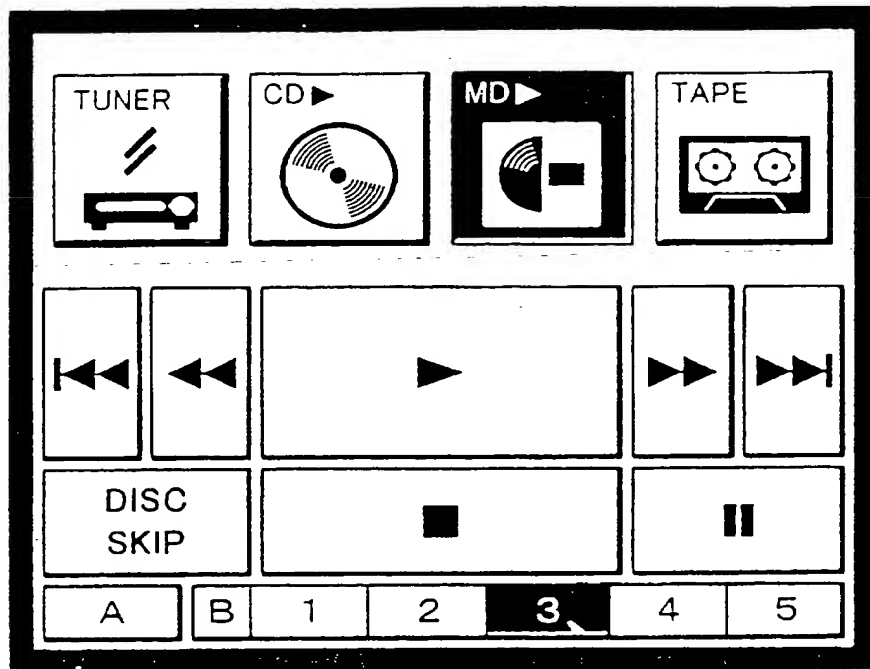


Fig. 10

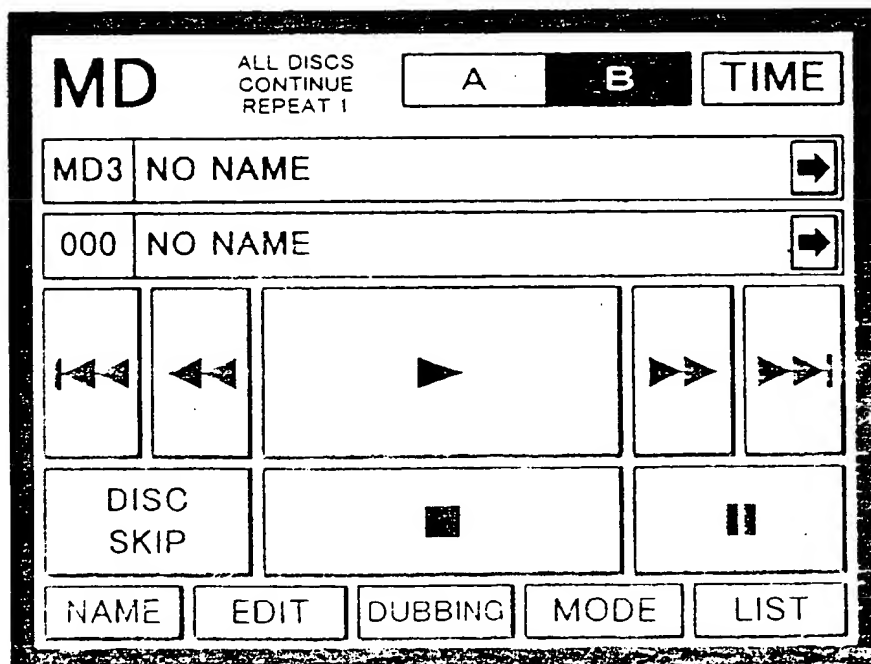

11/16

Fig. 11

M D

-

+

←→

送信

⤴

←→

送信

⤴

かな

カナ

あ

い

う

え

お

は

ひ

ふ

へ

ほ

あ

い

う

記号

英数大

か

き

く

け

こ

ま

み

む

め

も

え

お

つ

コード

英数小

さ

し

す

せ

そ

や

ゆ

よ

・

°

や

ゆ

よ

た

ち

つ

て

と

ら

り

る

れ

ろ

ー

な

に

ぬ

ね

の

わ

を

ん

、

。

×

参照

後退

スペース

取消

前候補

変換

確定

Fig. 12

TRACK NO.	NAME	TIME
1	A I U E O	1:20
	あ い う え お	

Fig. 13

かな	カナ	ア	イ	ウ	エ	オ	ハ	ヒ	フ	ヘ	ホ	ア	イ	ウ
記号	英数大	カ	キ	ク	ケ	コ	マ	ミ	ム	メ	モ	エ	オ	ツ
コード	英数小	サ	シ	ス	セ	ソ	ヤ	ユ	ヨ			ヤ	ユ	ヨ
	半角	タ	チ	ツ	テ	ト	ラ	リ	ル	レ	ロ	ー		
		ナ	ニ	ヌ	ネ	ノ	ワ	ヲ	ン	.	。			
×	参照	後退	スペース											確定

Fig. 14

かな	カナ	!	@	#	\$	%	^	&	*	_	=	-	+	/			
記号	英数大	[]	{	}	[]	<	>	"	"	7	8	9			
コード	英数小	Q	W	E	R	T	Y	U	I	O	P	4	5	6			
	半角	A	S	D	F	G	H	J	K	L	?	1	2	3			
		Z	X	C	V	B	N	M	\	:	:	0					
×	参照	後退	スペース											"	"		確定

Fig. 15

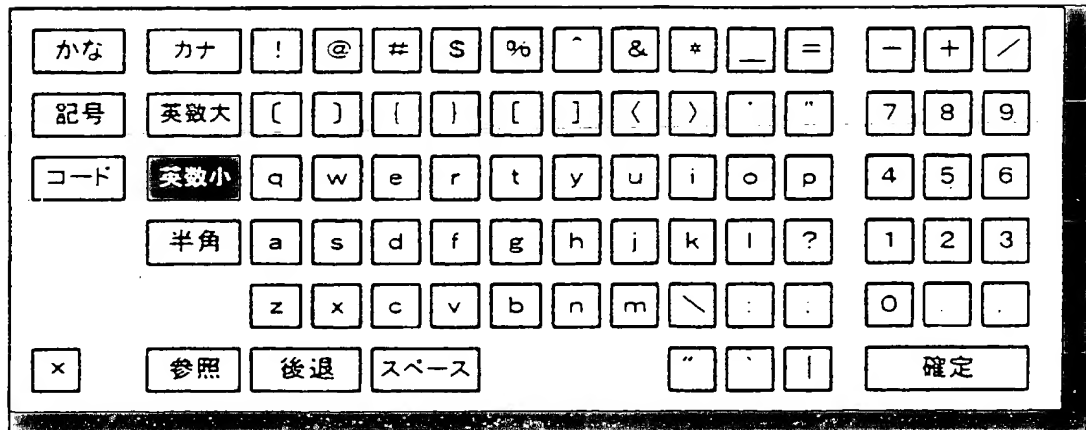


Fig. 16

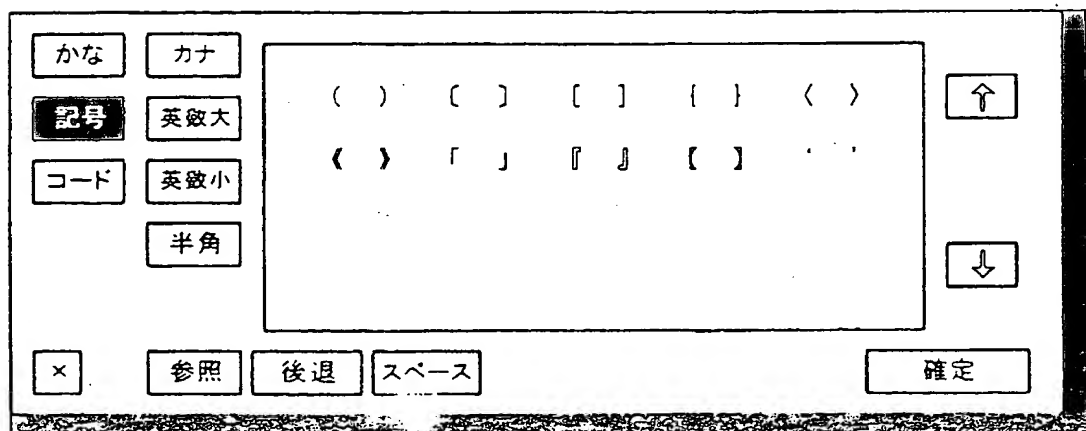


Fig. 17A

Fig. 17
Fig. 17A
Fig. 17B

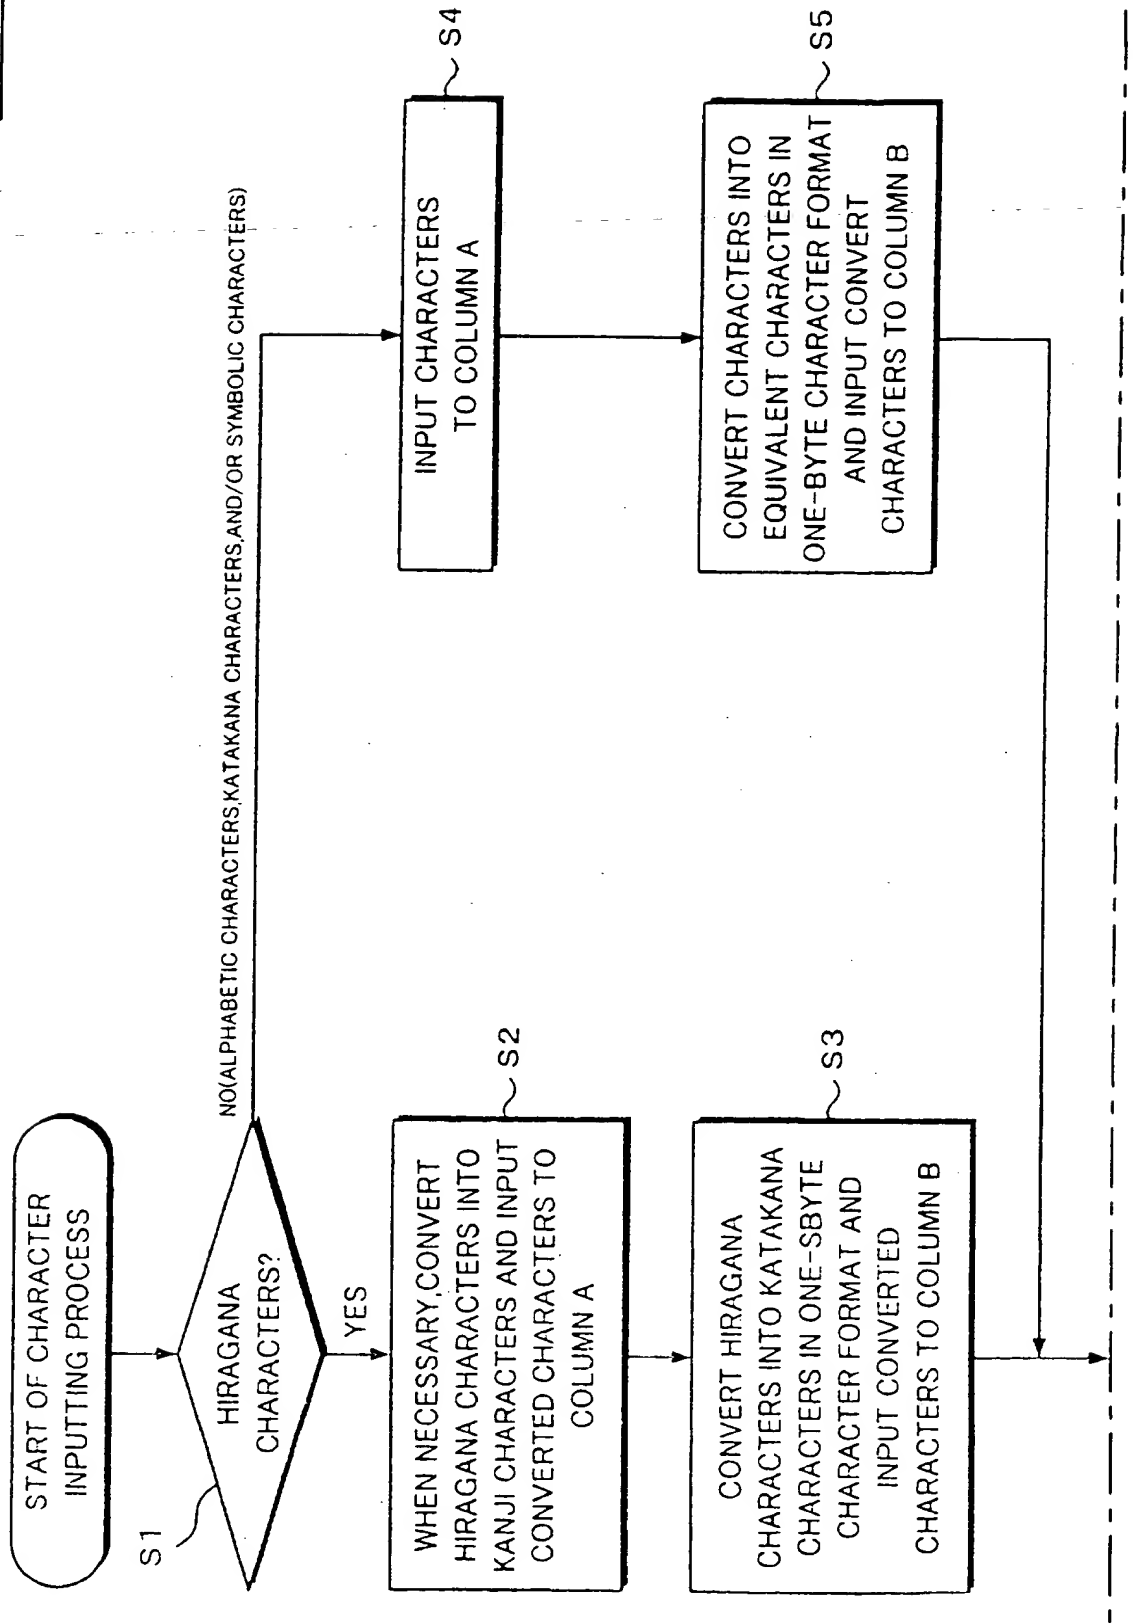


Fig. 17B


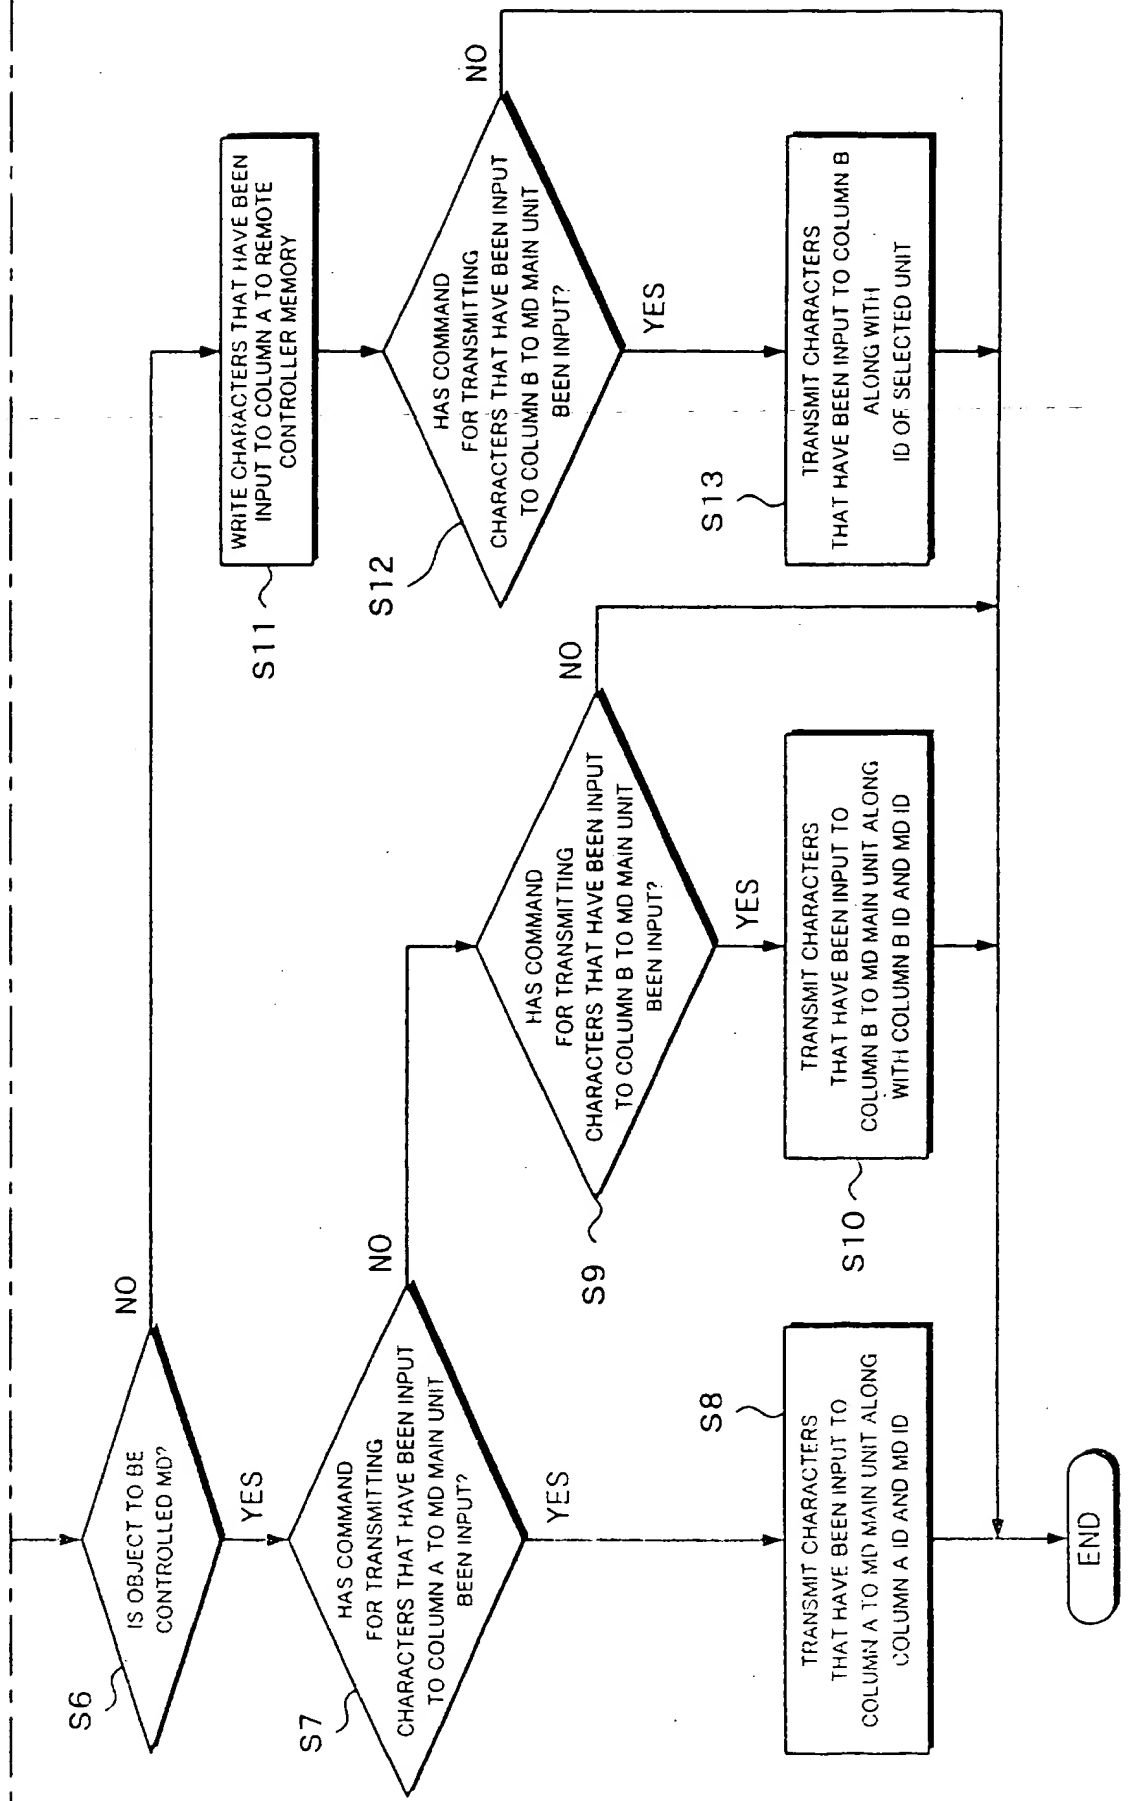


Fig. 18

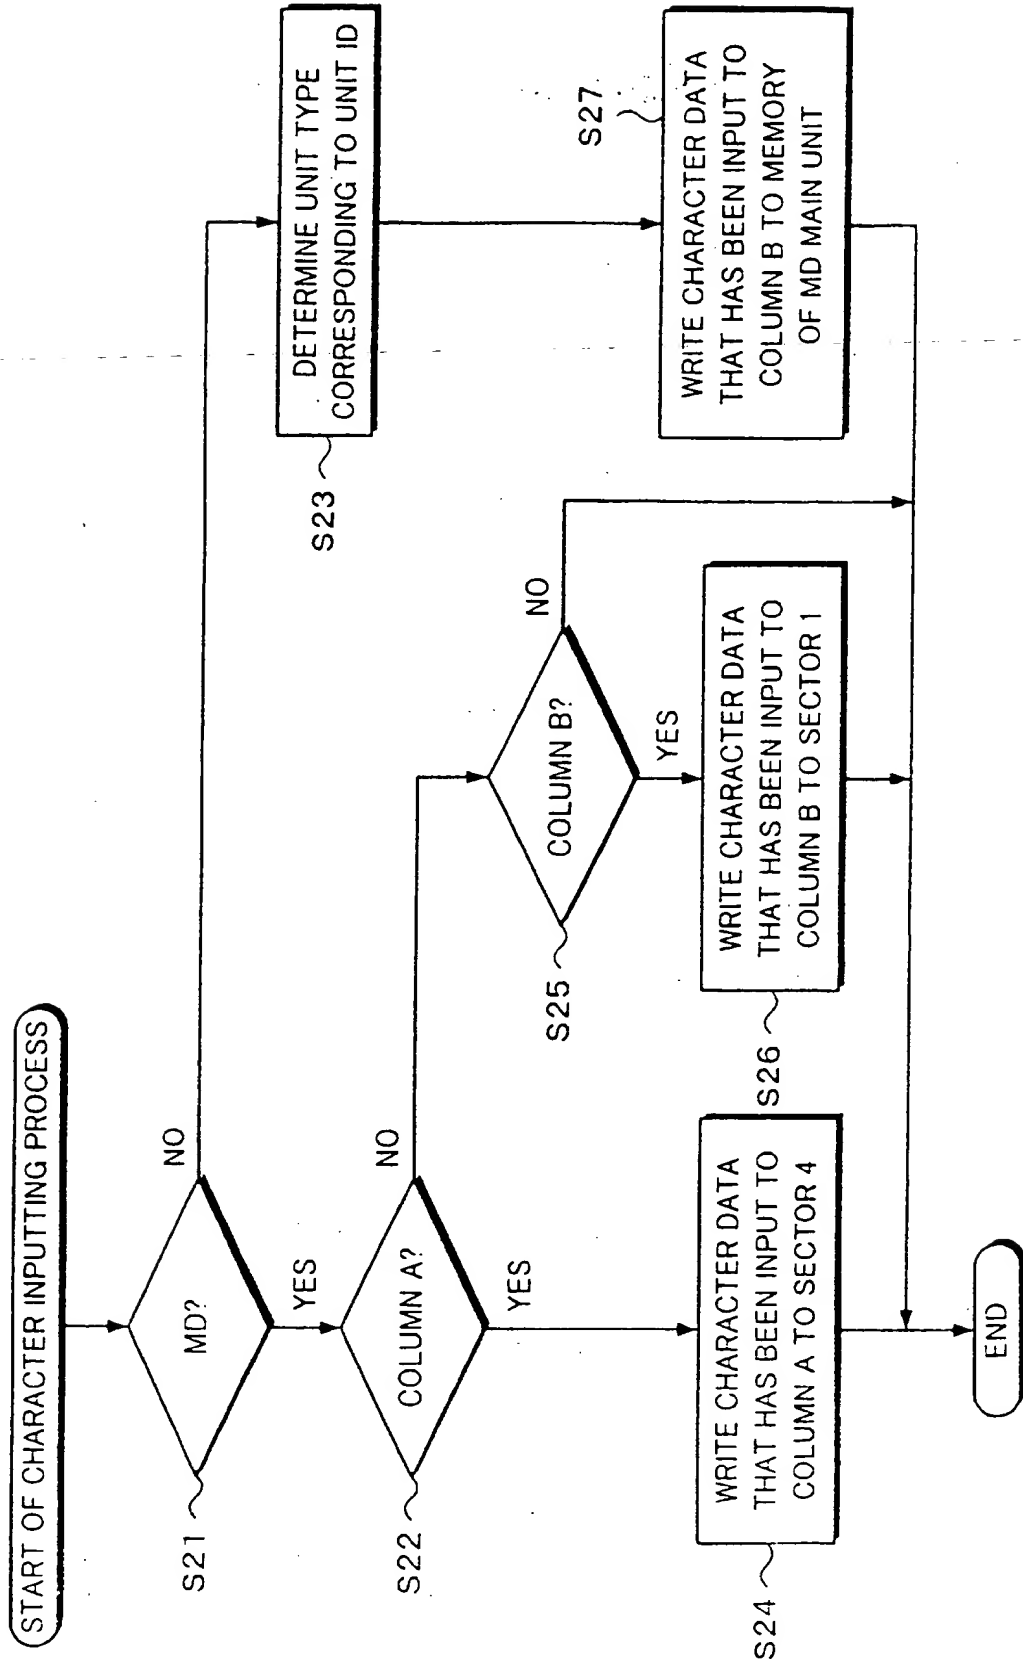

Digital Signal Recording and Reproduction

5 The present invention relates to a digital signal recording apparatus and a digital signal reproducing apparatus for recording/reproducing data to/from a digital signal record medium such as a magnetic optical disc. In addition, the present invention relates to a remote controlling apparatus for the digital signal recording apparatus and the digital signal reproducing apparatus and a controlling method for management information thereof.

10

 A magnetic optical disc apparatus that records a music program and so forth on a magnetic optical disc such as a MD (Mini Disc, registered trademark) is known. A U-TOC (User Table Of Content) area for managing information such as record position, record date/time, and title name concerned with a recorded program is

15

20 formed in the inner periphery of such a magnetic optical disc. The U-TOC area is structured as pages. In other words, the U-TOC area has a plurality of sectors. Next, an example of the structure of the U-TOC area will be described.

The U-TOC area is composed of for example 36 sectors. Sector 0 is used to manage start/end addresses of a main program recorded on the magnetic optical disc and start/end addresses of a recordable area thereof. Sector 1 is used to manage a title name of a main program recorded on the magnetic optical disc and a title name of the magnetic optical disc. When audio data is recorded on the magnetic optical disc, a title name is a program name. In addition, a title name of the magnetic optical disc is an album name or a performer's name.

Sector 2 is used to manage record date/time of a program. Sector 4 is used to manage Kanji characters, Hiragana characters, and Katakana characters (these are all Japanese character formats) corresponding to the title name (English characters) of Sector 1. Sectors 3 and 5 to 36 are reserved for future expansions.

Before a program recorded on the magnetic optical disc is reproduced, information is reproduced from the U-TOC area. The reproduced information is stored in a predetermined storing means such as a DRAM of the apparatus in such a manner that the reproduced information correlates with each program recorded on the magnetic optical disc. When a desired program is reproduced, a title corresponding thereto is read from the memory and displayed on a displaying portion.

Since such a conventional magnetic optical disc apparatus has only one character input field on its displaying portion so as to display character information such as a title name and an artist name concerned with a program to be reproduced, both character information recorded in sector 1 of the U-TOC area and character information recorded in sector 4 of the U-TOC cannot be set at a time.

In particular, since the character information recorded in sector 1 of the U-TOC area correlates with the character information recorded in sector 4 (in other words, the relation of original information and translated information such as English (alphabetic characters) and Japanese (Katakana characters)), when the title name display area is narrow, similar information should be redundantly input. Thus, such an apparatus is inconvenient for the user.

In the conventional magnetic optical disc apparatus, a title name is read from sector 1 or sector 4 of the U-TOC area corresponding to a mode that has been set by the user and displayed with a font that has been selected by the user. For example, the user can more easily see a title name displayed on the displaying portion in the native language (for example, Japanese) than a foreign language (for example, English). In addition, when an European/American music

program is reproduced, the program title is displayed in English. Thus, when alphabetic characters recorded in sector 1 are displayed, Japanese characters such as Kanji characters, Hiragana characters, and Katakana characters recorded in sector 4 are not displayed. In other words, advantages (such as a variety of fonts) of the apparatus cannot be effectively used.

A first aspect of the present invention is a digital signal recording apparatus, comprising a recording means for rewriting programs and character symbols recorded on a record medium having a program area for recording programs and a management area for managing a plurality of character symbols corresponding to the programs, an operating means for allowing the plurality of character symbols to be input when the character symbols are rewritten by the recording means, a displaying means having a display field corresponding to the plurality of character symbols that are input by the operating means, and a controlling means for causing the recording means to record the plurality of character symbols that are input by the operating means to the management area in such a manner that the plurality of character symbols correlate with the programs.

A second aspect of the present invention is a digital signal reproducing apparatus, comprising a reproducing means for reproducing programs and character

symbols from a record medium having a program area for recording programs and a management area for managing a plurality of character symbols corresponding to the programs, a storing means for storing the plurality of character symbols in such a manner that the plurality of character symbols correlate with the programs, and a displaying means having a display field corresponding to the plurality of character symbols that are recorded to the recording means.

10 A third aspect of the present invention is a remote controlling apparatus, comprising an operating means for inputting a plurality of character symbols that are transmitted to a unit to be controlled, a displaying means having a display field corresponding to the plurality of character symbols that are input by the operating means, a storing means for storing the plurality of character symbols that are input by the operating means, and a transmitting means for transmitting the plurality of character symbols stored in the storing means to the unit to be controlled along with an identifier that represents the unit to be controlled.

25 A fourth aspect of the present invention is a digital signal recording method, comprising the steps of (a) recording programs and character symbols to a record medium having a program area for recording programs and a

management area for managing a plurality of character symbols corresponding to the programs, (b) inputting the plurality of character symbols recorded at step (a), and (c) displaying the plurality of character symbols that are input at step (b) on a predetermined display field.

A fifth aspect of the present invention is a digital signal reproducing method, comprising the steps of (a) reproducing programs and character symbols from a record medium having a program area for recording programs and a management area for managing a plurality of character symbols corresponding to the programs, (b) storing the plurality of character symbols in such a manner that the plurality of character symbols correlate with the programs, and (c) displaying the plurality of character symbols that are recorded at step (b) to a display field.

The hereinafter described embodiments of the present invention can provide:

a digital audio signal recording apparatus that allows character information such as titles of individual programs to be displayed and input in a plurality of character formats (for example, Hiragana characters, Kanji characters and alphabetic characters); and/or a digital audio signal recording apparatus and a reproducing apparatus thereof that allow character information to be displayed in a plurality of character formats in the reproducing mode and the like.

These and other features and advantages of the present invention will become more apparent in light of the following detailed description of embodiments thereof given by way of non-limitative example with reference to the accompanying drawings in which:

Fig. 1 is a block diagram showing the overall structure of a digital signal recording/reproducing apparatus according to the present invention;

Fig. 2 is a schematic diagram showing the medium format of a rewritable magnetic optical disc;

Fig. 3 is a table showing the structure of sector 0 of an U-TOC area for managing a record position of each program;

Fig. 4 is a schematic diagram showing a link state of pieces of data dispersedly recorded in a program area of a rewritable magnetic optical disc;

Fig. 5 is a table showing the structure of sector 1 of the U-TOC area for managing a title name of each program recorded in a first character format;

Fig. 6 is a table showing the structure of sector 2 of the U-TOC area for managing the record date/time of each program;

Fig. 7 is a table showing the structure of sector 4 of the U-TOC area for managing a title name of

each program recorded in a second character format;

Fig. 8A is an external view showing the structure of a remote controlling portion according to the present invention;

5 Fig. 8B is a block diagram showing the structure of the remote controlling portion according to the present invention;

10 Fig. 9 is a schematic diagram showing a display screen on which each recording/reproducing apparatus is controlled with the remote controlling portion;

Fig. 10 is a schematic diagram showing a title display screen on which a rewritable magnetic optical disc is operated;

15 Fig. 11 is a schematic diagram showing a title name input screen on which a rewritable magnetic optical disc is operated;

20 Fig. 12 is a schematic diagram showing a two-line character input field to which alphabetic characters are input to one line and Hiragana characters are input to the other line so as to operate a rewritable magnetic optical disc;

25 Fig. 13 is a schematic diagram showing a software keyboard displayed in the case that a "Kana character" display mode has been selected as a character input screen;

Fig. 14 is a schematic diagram showing a

software keyboard displayed in the case that an
"Uppercase alphabetic character" display mode has been
selected as a character input screen;

5 Fig. 15 is a schematic diagram showing a software
keyboard displayed in the case that a "Lowercase
alphabetic character" display mode has been selected as a
character input screen;

 Fig. 16 is a schematic diagram showing a software
10 keyboard displayed in the case that a "Symbolic
character" display mode has been selected as a character
input screen;

 Figs. 17A and 17B are flow charts showing a process
performed on the remote controlling portion side for
15 automatically inputting character information in a
particular character format corresponding to an input
operation of character information in another character
format of a plurality of character formats; and

 Fig. 18 is a flow chart showing a process performed
20 on the recording/reproducing apparatus side for
automatically inputting character information in a
particular character format corresponding to an input
operation of character information in another character
format of a plurality of character formats.

25 Next, with reference to the accompanying drawings,
an embodiment of the present invention will

be described. Fig. 1 is a block diagram showing the overall structure of an Mini Disc (hereinafter referred to as MD) apparatus according to an embodiment of the present invention. The diameter of an MD is as small as 64 mm in comparison with 12 cm of a Compact Disc (hereinafter referred to as CD). An MD is a magnetic optical disc that is superior to a CD in portability. The MD apparatus is a magnetic optical disc apparatus that records information on an MD and reproduces information therefrom. Referring to Fig. 1, as will be described later, an MD main unit 30 receives a user's command through a remote controlling portion 100 and outputs information (such as audio information) that the user requires.

An MD 1 is housed in a cartridge with a shutter mechanism. When information is recorded to the MD 1 or reproduced therefrom, the shutter mechanism is opened. In this state, light emitted by an optical pickup is radiated to the MD 1. In addition, a magnetic field generated by a magnetic head is applied to the MD 1. When the MD 1 is loaded to the MD main unit 30 in the recording mode, the reproducing mode, or the like, the MD 1 is rotated at CLV (Constant Linear Velocity) by a spindle motor 2. An optical head 3 and the magnetic head 6 are disposed in the MD main unit 30 in such a manner that the optical head 3 and the magnetic head 6 are oppositely positioned with the MD

1. A thread motor 5 is disposed in the MD main unit
30. The thread motor 5 largely travels the optical
head 3 in the radial direction of the MD 1.

The optical head 3 is composed of an
5 objective lens 3a, a two-axis mechanism 4, a
semiconductor laser (not shown), and a light receiving
portion (not shown). The intensity of laser light
emitted from the semiconductor laser is varied between
the recording mode and the reproducing mode. The light
10 receiving portion is composed of a plurality of areas.
The light receiving portion receives light of which the
laser light emitted by the semiconductor laser is
reflected by the MD 1 and generates detection signals
of the individual areas thereof. The polarization of
15 the reflected light varies corresponding to record
information by magnetic Kerr effect. The light
receiving portion detects a magnetic field vector
corresponding to the variation of the polarization and
generates a detection signal corresponding to the
20 detected magnetic field vector. The two-axis mechanism
4 is composed of a focusing coil and a tracking coil.
The focusing coil drives the objective lens 3a in the
direction of which the objective lens 3a approaches the
record surface of the MD 1 or goes away therefrom. The
25 tracking coil drives the objective lens 3a in the
radius direction of the MD 1.

Next, the structures and operations of a data

reproducing system, a servo system, and a portion that processes a reproduced signal will be described. The detection signals generated by the light receiving portion of the optical head 3 are supplied to an RF amplifier 7. The RF amplifier 7 generates a focus error signal FE, a tracking error signal TE, an RF signal, and a spindle error signal corresponding to the detection signals. The focus error signal FE and the tracking error signal TE are supplied to a servo circuit 9. The RF signal is supplied to an EFM/CIRC encoder/decoder 8 and an address decoder 10. The spindle error signal is supplied to a system controlling portion 11.

The servo circuit 9 compensates the phases of the signals received from the RF amplifier 7 and adjusts the gains thereof. Output signals of the servo circuit 9 are supplied to the focusing coil and the tracking coil of the two-axis mechanism 4 through a drive amplifier (not shown).

The servo circuit 9 has an LPF (Low Pass Filter) (not shown). The tracking error signal TE is supplied to the LPF. Corresponding to the output signal of the LPF, a thread error signal is generated. The thread error signal is supplied to the thread motor 5 through a thread drive amplifier (not shown). The thread motor 5 operates corresponding to the thread error signal.

The EFM/CIRC encoder/decoder 8 performs the following processes corresponding to the RF signal received from the RF amplifier 7. The EFM/CIRC encoder/decoder 8 converts the RF signal into a binary signal and demodulates the binary signal by EFM (Eight to Fourteen Modulation) demodulating process. The EFM demodulating process is a demodulating process for record data that has been EFM-modulated. In addition, the EFM/CIRC encoder/decoder 8 performs an error correcting process corresponding to CIRC (Cross Interleave Reed-Solomon Coding) method for the resultant signal.

Thus, the EFM/CIRC encoder/decoder 8 generates a spindle error signal for controlling the rotation of the MD 1 corresponding to the binary signal corresponding to the RF signal or corresponding to address data extracted by the address decoder 10 and supplies the spindle error signal to the system controlling portion 11. The system controlling portion 11 controls the spindle motor 2 corresponding to the spindle error signal. The EFM/CIRC encoder/decoder 8 controls the operation of a PLL (Phase Locked Loop) thereof corresponding to the binary EFM signal.

The EFM/CIRC encoder/decoder 8 supplies the resultant decoded signal to a memory controller 12. As will be described later, the memory controller 12 writes the output signal of the EFM/CIRC

encoder/decoder 8 to a RAM (Random Access Memory) 13 under the control of the system controlling portion 11. In addition, the memory controller 12 reads a signal from the RAM 13.

5 The signal that is read from the RAM 13 is supplied to an audio compression encoder/decompression decoder 14. The audio compression encoder/decompression decoder 14 decompresses the received signal that has been compressed corresponding to for example ATRAC (Acoustic Transferred Adopted Coding) method. The decompressed signal is supplied to a D/A converter 15. The D/A converter 15 converts the received digital data into analog audio signal. The analog audio signal is supplied to an audio outputting means (not shown) through an audio output terminal 16.

10 As will be described later, grooves have been formed on the MD 1 in a zigzag pattern at a predetermined frequency (for example, 22.05 Hz). Address data that had been FM-modulated has been recorded on the MD 1. The address data decoder 10 extracts the address data corresponding to the RF signal received from the RF amplifier 7. A BPF (Band Pass Filter) that allows only a predetermined frequency to pass is disposed in the address data decoder 10. By FM-demodulating the RF signal received from the BPF, 25 the address data is extracted. The extracted address data is supplied to the EFM/CIRC encoder/decoder 8.

Next, the processes performed by the memory controller 12 will be described in detail. The output signal of the EFM/CIRC encoder/decoder 8 is written to the RAM 13 at a transmission rate of for example, 1.4
5 Mbits/sec. When the amount of the signal written to the RAM 13 exceeds a predetermined value, the signal is read from the RAM 13 at a lower transmission rate of for example, 0.3 Mbits/sec than the transmission rate in the data writing mode. Since the reproduced signal
10 is temporarily stored to the memory and then output as audio data, the audio data can be prevented from being lost even if a track jump due to an external disturbance (such as vibration) takes place.

When a track jump due to an external
15 disturbance such as vibration takes place, a process for moving the optical head 3 to the address at which such a track jump has taken place is performed. While such a process is being performed, the memory controller 12 reads the signal from the RAM at the low
20 transmission rate and outputs the resultant audio data. Thus, even if the MD main unit 30 stops reproducing data from the MD 1 due to a track jump, when the period of the track jump is less than a predetermined value, the audio data can be prevented from being lost. When
25 the RAM 13 has a storage capacity of for example 4 Mbytes, it can store audio data of up to around 10 seconds. The memory controller 12 is controlled by the

system controlling portion 11.

Next, the structure and operation of the recoding system of the MD main unit 30 will be described. An analog signal is output from an analog output terminal of a digital reproducing apparatus such as a CD player. The analog signal is supplied to an A/D converter 18 through an audio input terminal 17.

The A/D converter 18 converts the received analog signal into a digital signal. The digital signal is supplied to the audio compression encoder/decompression decoder 14. When a digital signal received from a digital output terminal of a digital reproducing apparatus is input, the digital signal is supplied to the audio compression encoder/decompression decoder 14 through an input terminal 21.

The audio compression encoder/decompression decoder 14 compresses the received digital signal corresponding to a predetermined compressing method such as ATRAC (Acoustic Transfer Adapted Coding) method. The compressed digital signal is temporarily stored in the RAM 13 through the memory controller 12 at a transmission rate of for example 0.3 Mbits/second. When the memory controller 12 detects that a predetermined amount of the digital signal has been stored in the RAM 13, the memory controller 12 allows the digital signal to be read from the RAM 13.

The digital signal that is read from the RAM

13 is supplied to the EFM/CIRC encoder/decoder 8. The EFM/CIRC encoder/decoder 8 performs the EFM modulating process and the error correcting process corresponding to CIRC encoding method for the digital signal and supplies the resultant signal to a magnetic head driving circuit 150. The magnetic head driving circuit 150 drives an N pole or an S pole of the magnetic head 6 corresponding to the received signal. In addition, the power of the light emitted by the semiconductor laser of the optical head 3 is controlled so that it becomes higher than in the reproducing mode. The surface of the MD 1 is heated up to Curie temperature so that the magnetic field is inverted. In this state, the data is recorded.

The system controlling portion 11 performs various controlling processes concerned with the recording/reproducing operations. For example, the system controlling portion 11 controls the signal process performed by the memory controller 12 with the RAM 13, the spindle controlling process corresponding to the spindle error signal received from the EFM/CIRC encoder/decoder 8, and the encoder/decoder controlling process for the EFM/CIRC encoder/decoder 8.

In addition, the system controlling portion 11 transmits various servo commands to the servo circuit 9 corresponding to user's operations performed through a key portion 19 or a remote controlling

portion 100 (that will be described later). Moreover,
the system controlling portion 11 causes a displaying
portion 20 such as a LCD (Liquid Crystal Display) to
display predetermined information such as character
5 information. Examples of information displayed on the
displaying portion 20 are still picture, time
information (such as total reproduction time of the MD
1, elapsed time of a program that is being reproduced,
remaining reproduction time of a program that is being
10 reproduced, and remaining reproduction time of total
reproduction time), and track information of a program
that is being reproduced. When a disc name, a track
name, a program name, and so forth have been recorded
on the MD 1, they are also displayed on the displaying
15 portion 20.

Examples of user's operations that are
performed or input through the key portion 19 and the
remote controlling portion 100 are power on/off
commands, cartridge eject command, playback command,
20 pause command, stop command, program selection command,
and record command. Information concerned with
operations are input from the remote controlling
portion 100 and transmitted to the system controlling
portion 11 by a predetermined transmitting method using
25 infrared rays or the like. The MD main unit 30 has a
transmitting/receiving unit 22 that transmits
information to the remote controlling portion 100 and

receives information therefrom.

Information that is transmitted from the MD main unit 30 is for example information concerned with programs recorded on the MD 1. When the user selects a program, he or she references such information. Such information is reproduced from a predetermined record area such as a P-TOC (Pre-mastered TOC) area or the U-TOC area recorded on the MD 1. The detail of the P-TOC area will be described later. The reproduced information is supplied to the transmitting/receiving unit 22 by the system controlling portion 11. The user may communicate with the system controlling portion 11 through for example a personal computer 40 and an interface 39 as well as the key portion 19 and the remote controlling portion 100. In this case, software that allows the personal computer 40 to communicate with the system controlling portion 11 and information to be displayed on a monitor screen is required.

Each of the key portion 19 and the remote controlling portion 100 has a function that allows the user to record desired information such as a title of each program to the MD 1. The information that has been recorded on the MD 1 is displayed on the displaying portion 20 while the relevant program is being reproduced.

Information such as a title of each program is recorded in the U-TOC area of the MD 1. The U-TOC

area is a record area that is different from a program area. As will be described later, the U-TOC area is composed of a plurality of sectors. In other words, information such as a title of each program is recorded to different sectors depending on whether or not character codes of the information are based on MS-JIS (Microsoft -- Japanese Industrial Standard) (such as Kanji characters, Hiragana characters, and Katakana characters in two-byte character format) or ISO (International Standard Organization) 8859-1 (such as alphabetic characters and Katakana characters in one-byte character format). According to the present invention, character data of a title of each program in a plurality of character formats can be input at a time on the same screen of the displaying portion of the remote controlling portion 100.

Next, for easy understanding of the present invention, with reference to Fig. 2, the medium format of the MD 1 will be described. The MD 1 is composed of a polycarbonate substrate and an information film coated thereon. A clamping plate 41 composed of a magnetic substance is disposed at the center of the MD 1. The information film has a data record film and a data reproduction film. The data record film is composed of a dielectric layer, an MO (Magnetic Optical) layer, a dielectric layer, a reflection film, and a protection film that are disposed successively on

the substrate. The data reproduction film is composed of a reflection film and a protection film. The area other than the clamping plate 41 of the MD 1 is an information area 42.

5 A lead-in area 43 is formed on the innermost periphery side of the information area 42. The data reproduction film is coated in the lead-in area 43. In the data reproduction film, information has been recorded as pits. A recordable area 44 is formed
10 outside the lead-in area 43. The data record film is coated in the recordable area 44. A lead-out area 45 is disposed on the outermost periphery of the MD 1. A program area 47 for recording each program is formed outside the recordable area 44. A U-TOC area 46 for
15 recording a U-TOC is formed on the inner periphery side of the recordable area 44. In the U-TOC area 46, information concerned with each program recorded in the program area 47 is recorded.

20 A calibration area 48 is formed between the lead-in area 43 and the U-TOC area 46 (in other words, on the innermost periphery of the recordable area 44). The calibration area 48 is formed so as to adjust a laser output power in the recording mode. A gap area
25 49 is formed between the U-TOC area 46 and the program area 47. User data is not recorded in the calibration area 48 and the gap area 49.

A P-TOC has been recorded as pre-pits in the

lead-in area 43. In the P-TOC, information such as the start address of the U-TOC area, the laser power value in the recording mode, and the start address of the calibration area 46 has been recorded.

5 To record/reproduce a program to/from the MD 1, management information (namely, the P-TOC and the U-TOC) that has been recorded on the MD 1 should be read.

The system controlling portion 11 determines an address of an area of the MD 1 to/from which a program is recorded/reproduced corresponding to the management information. The management information is read when the MD 1 is loaded to the MD main unit 30. The management information that has been read from the MD 1 is stored in a predetermined storing means such as a
10 DRAM (not shown). When a program is recorded or reproduced, the management information is referenced.
15

When data is recorded or erased, the U-TOC is edited and rewritten. Whenever data is recorded/erased, the system controlling portion 11
20 edits the U-TOC stored in the predetermined storing means. The edited U-TOC is written to the U-TOC area 46 of the MD 1 at predetermined timing (in other words, when the eject command of the MD 1 or the power off command is input). Since the U-TOC information is
25 temporarily stored in the storing means, the storing period of the U-TOC information can be shortened in comparison with the case that the U-TOC information is

recorded to the U-TOC area 4 of the MD 1 whenever the U-TOC information is rewritten. Thus, the performance of the MD main unit 30 can be improved. However, whenever the U-TOC information is rewritten, it may be recorded to the U-TOC area 46 of the MD 1.

For easy understanding of the U-TOC information managed in the U-TOC area 46, the data format of the program area 47 will be described. Data is recorded or reproduced as clusters. One cluster is composed of for example 36 sectors. One sector is composed of for example 2352 bytes. The 36 sectors consist of three linking sectors, one sub data sector, and 32 main data sectors.

The CIRC interleave length of the data format of the MD is larger than the length of one sector (for example, 13.3 msec) in the format of a conventional error correcting process used for a CD or the like. To allow one reproducing system to reproduce data recorded on both a CD and an MD, such linking sectors are provided. Thus, meaningful information is not recorded in the linking sectors. In addition, the sub data sector is reserved for a future expansion.

Two sectors are used as one group. One group is divided into for example 11 sound groups. One sound group is composed of for example 424 bytes of data of left and right channels. 11 sound groups are referred to as one sound frame.

As described above, the U-TOC is table-of-content information for managing each program recorded in the program area 47. Next, the U-TOC area 46 for recording the U-TOC will be described. The U-TOC area 46 is composed of for example 32 sectors. Next, sectors 0, 1, 2, and 4 of the 32 sectors will be described. Sectors 3 and 5 to 32 are reserved for future expansions.

Sector 0 is used to manage the start address and end address of each program recorded in the program area 47, copy protect information, and emphasis information. Fig. 3 shows an example of the structure of sector 0. Each of sectors 0, 1, 2, and 3 is composed of 2352 bytes arranged as 588 four-byte slots. The 588 four-byte slots are identified slot 0 to slot 597. In slot 0 to slot 77, a header portion, a cluster H, a cluster L, a maker code, a model code, a first TNO, a last TNO, a sector in-use state, a disc serial number, and a disc ID are successively recorded. The cluster H and the cluster L represent predetermined addresses. The maker code and the model code represent a manufacturer name and a model name of the disc, respectively. The first TNO and the last TNO represent the first and last program numbers, respectively.

In addition, a P-DFA (Pointer for Defective Area), a P-EMPTY (Pointer for Empty slot), a P-FRAM (Pointer for Freely Area), and a relevant table

representation data portion are successively recorded.
The P-DFA represents the start position of a slot for
storing information concerned with the position of a
defect that takes place on the MD 1. The P-EMPTY
5 represents the in-use state of a slot. The P-FRA
represents the start position of a slot for managing a
recordable area. The relevant table representation
data portion is composed of P-TNO1, P-TNO2, ..., and P-
TNO255 that represent the start positions of slots
10 corresponding to the individual program numbers.

Slot 78 to slot 527 are slots pointed by the
above-described various pointers. Each slot is
composed of four bytes. Each slot is used to manage a
start address, an end address, a track mode, and link
15 information.

In the MD apparatus according to the present
invention, data is not always sequentially recorded on
the MD, which is a record medium. In other words, data
dispersedly recorded on a record medium can be
20 correctly reproduced. Next, a process for correctly
reproducing data dispersedly recorded on a record
medium will be described. As described above, data is
temporarily stored in the RAM 13. Moreover, in the RAM
13, the data write rate is larger than the data read
25 rate. Thus, the reproducing system can perform the
following data processes.

The optical pickup 6 is successively accessed

to data that has been dispersedly recorded on the disc.
Corresponding to the reproduced signal, the EFM/CIRC
encoder/decoder 8 generates reproduced data. The
reproduced data is stored in the RAM 13. When data is
5 read from the RAM 13, the data is sequentially arranged
and supplied to the audio compression
encoder/decompression decoder 14.

Next, a process for correctly connecting data
that has been dispersedly recorded will be described.

10 This process is performed with reference to the P-FRA
in sector 0 of the U-TOC. Fig. 4 shows the case that
03h (where h represents hexadecimal notation) is
recorded in the P-FRA. In this case, slot 03h is
accessed. A start address and an end address recorded
15 in slot 03h represent a start address and an end
address of one part recorded on the disc.

Link information recorded in slot 03h
represents an address of a slot to be continued. The
address of the slot to be continued from slot 03h is
20 18h. Thus, slot 18h is accessed. Since link
information recorded in slot 18h is 1Fh, slot 1Fh is
accessed. Corresponding to link information of slot
1Fh, slot 2Bh is accessed. Corresponding to link
information of 2Bh, slot E3h is accessed. Until link
25 information of a slot to be continued becomes null
(namely, 00h), link information is successively traced.

In such a manner, addresses of data that has

been dispersedly recorded are successively obtained.
The MD main unit 30 controls the optical pickup 6 and
successively accesses such addresses on the MD 1.
Thus, when the MD main unit 30 reads data from the RAM
5 13, the MD main unit 30 can connect data that has been
dispersedly recorded.

In the above-described process, data that has
been dispersedly recorded is connected with reference
to the P-FRA. Alternatively, data that has been
10 dispersedly recorded can be connected with reference to
the P-DFA, the P-EMPTY, or the P-TNO1, P-TNO2, ..., and
P-TNO255. In sector 1 of the U-TOC area 46, titles
of all programs recorded in the program areas 47 and a
disc title of the MD 1 are managed. When programs
15 recorded on the MD 1 are audio data, the disc title of
the MD 1 is an album title, information concerned with
a performer, and so forth. The titles of the
individual programs are song names. Fig. 5 shows an
example of the structure of sector 1 of the U-TOC area
20 46.

Character information of each program is
recorded in a slot of the character table portion
corresponding to the relevant table representation data
P-TNAX (where $x = 1$ to 255). When the number of
25 characters is large, a plurality of slots are linked
with link information. In sector 1 of the U-TOC area
46, available character codes have been defined so that

titles are managed with alphabetic characters.

However, when the user designates Katakana character input mode, a special code "^" is automatically generated. The alphabetic characters are surrounded by a pair of special codes "^" and managed in sector 1.

The alphabetic characters surrounded with a pair of special codes "^" are converted into Katakana characters with a conversion table. With the conversion table, for example, "^a^" is converted into "ア" (Katakana character).

Fig. 6 shows an example of sector 2 of the U-TOC area 46. Sector 2 is used to manage record date/time of each program recorded in the program area 47. Fig. 7 shows an example of sector 4 of the U-TOC area 46. With character codes defined for sector 4, titles of individual programs recorded in the program area 47 can be displayed in Kanji characters, Hiragana characters, and/or Katakana characters.

Next, a process for inputting characters such as a title in sector 1 or sector 4 of the U-TOC area 46 will be described. Fig. 8A is an external view showing the external structure of the remote controlling portion 100. The remote controlling portion 100 comprises a commander off button 101, a sleep button 102, a displaying portion 104, a touch panel 103, a volume adjustment button 105, a jog dial knob 106, a muting button 108, a contrast adjustment knob 109, and

a brightness adjustment dial 110. The touch panel 103 is additionally disposed on the displaying portion 104.

Fig. 8B is a block diagram showing the internal structure of the remote controlling portion 100. The remote controlling portion 100 comprises a transmitting/receiving portion 111, a controlling portion 112, a remote controller memory 113, an operating portion 114, and a displaying portion 104. The transmitting/receiving portion 111 transmits/receives data from/to the MD main unit 30 to/from the transmitting/receiving unit 22 with infrared rays or the like. The controlling portion 112 is a microcomputer or the like. The remote controller memory 113 is connected to the controlling portion 112. The operating portion 114 has function keys and character input keys for selecting an operation object other than MD functions of the MD main unit 30. The displaying portion 104 displays operation information corresponding to a selected function.

The user operates the MD main unit 30 with the operating portion 114 while seeing operation information displayed on the displaying portion 104. The remote controller memory 113 stores a software program necessary for the remote controlling portion 100, user operation information for the operating portion 114, and display information displayed on the displaying portion 104. The transmitting/receiving

portion 111 transmits user's operation commands that are input with the operating portion 114. In addition, the transmitting/receiving portion 111 receives control signals and information of character codes from the MD main unit 30 with the transmitting/receiving unit 22 of the MD main unit 30. Next, with reference to Fig. 8A, the operation of the remote controlling portion 100 will be described in detail.

The commander off button 101 is used to prohibit the remote controlling portion 100 from transmitting user's commands to the MD main unit 30. The sleep button 102 is used to cause the MD main unit 30 to enter the sleep mode. The displaying portion 104 is for example an LCD monitor.

The touch panel portion 103, which is additionally disposed on the displaying portion 104, is composed of a plate having a resistor film, an electrostatic film, or the like. On the touch panel portion 103, the resistance varies corresponding to the two-dimensional position. When the user touches the surface of the touch panel portion 103 with an operation part such as a touch pen, a signal for a particular command corresponding to the touched position is generated. Since the touch panel portion 103 fully covers the upper surface of the displaying portion 104, optical characteristics such as transmissivity of light should satisfy predetermined

conditions so that the visibility of the displaying portion 104 does not deteriorate.

Since the touch panel portion 103 and the displaying portion 104 are disposed with the relation of the positions thereof, the user can know a position that he or she should touch on the touch panel portion 103 corresponding to data displayed on the displaying portion 104. Data is displayed on the displaying portion 104 with GUI (Graphical User Interface) that is software stored in the remote controller memory 113.

The volume adjustment button 105 is used to adjust the volume level of audio sound that is reproduced. The jog dial knob 106 is used as a selecting means to select a user's command or a program to be reproduced. The muting button 108 is used to muffle an audio output in the reproducing mode. The contrast adjustment knob 109 is used to adjust the contrast of the screen of the displaying portion 103. The brightness adjustment dial 110 is used to adjust the brightness of the screen of the displaying portion 103.

Next, with reference to examples of screens displayed on the displaying portion 104, a process for inputting character information such as titles will be practically described. Fig. 9 shows a screen for selecting an object to be controlled. The MD main unit 30 composes an audio recording/reproducing system along

with a radio receiver, a CD reproducing unit, a tape recorder, and so forth. Thus, the remote controlling portion 100 can control these units. On the screen shown in Fig. 9, the user touches an icon of a unit to be controlled with the touch pen or the like.

Next, a process performed in the case that the MD main unit has been selected as an object to be controlled will be described. When the icon for the MD main unit has been selected, a screen shown in Fig. 10 is displayed. On the screen shown in Fig. 10, the user can select for example a playback start command, a program skip command, a playback stop command, a pause command, and a disk skip command as playback commands with the touch panel portion 103. In other words, icons for these commands are displayed on the touch panel portion 103. When the user touches a desired icon on the touch panel portion 103 with the predetermined operating means, a command corresponding to the touched icon is sent to the MD main unit 30. The icons for the playback commands are shown in the center to lower regions of the touch panel portion 103.

As shown in Fig. 10, icons for commands other than the playback commands are displayed in a lower region of the touch panel portion 103. Examples of these commands are a character input command (NAME), an edit command (EDIT) for a cut and paste process for each program (namely, audio information), a dubbing

command (DUBBING) for recording information of another record medium, a mode selecting command (MODE) for selecting a playback order of programs (such as a repetitive playback mode or a random playback mode), and a list command (LIST) for displaying available programs in a list format.

Since the present invention features a character input function, a process performed in the case that the icon "NAME" is touched on the touch panel portion 103 shown in Fig. 10 and a character input function is selected will be described. Fig. 11 shows an example of the character input screen. On the character input screen, "MD" is displayed at the upper left corner thereof. "MD" represents that the MD main unit has been selected as an object to be controlled. A display field just below "MD" shows a track name, a disc name, or the like that is read from the P-TOC area. "+" and "-" icons on the right of the display field are used to increment/decrement a track number for a desired track. With the selected track number, a desired program can be selected from programs recorded in the program area 47 so as to record character information with the character input function.

Just below the display field, a two-line character input field is displayed. One of the two lines of the character input field shows character information to be recorded in sector 1 of the U-TOC

area. The other line shows character information to be recorded in sector 4 of the U-TOC area. Thus, in the above-described structure of the U-TOC area, one line is used to input alphabetic characters or Katakana characters (in one-byte character format), whereas the other line is used to input Kanji characters, Hiragana characters, and Katakana characters (in two-byte character format).

Fig. 12 shows another format of the two-line character input field shown in Fig. 11. In Fig. 12, since a field "Track No" shows "1", it is clear that character information that can be input is for the first program. As the name of the first program, "AIUEO" can be input in alphabetic character format (one-byte character format). In addition, "あいうえお" can be input in Kanji character format (two-byte character format). On the right of the character input field, a field "time" that represents time information is disposed.

In the remote controlling portion 100, the displaying portion 104 has the above-described two-line character input field. Thus, the user can see input characters in two character formats at a time. After confirming the relation of the characters in the two character formats, the user can cause the remote controlling portion 100 to transmit the input characters to the MD main unit. The user can freely

designate the relation between characters that are input to the two lines of the character input field. For example, the first line may be used to input a music program title with alphabetic characters, whereas
5 the second line may be used to input the equivalent music program title with Japanese characters.

Alternatively, the first line may be used to input a title name, whereas the second line may be used to input an artist name. On the right of the two-line
10 character input field, icons for command for transmitting characters in the individual lines of the character input field are displayed. When the user touches these icons, the characters in the first line of the character input field and the character in the
15 second line thereof are stored in sector 1 and sector 4 of the U-TOC area, respectively.

Alternatively, several program titles in a plurality of formats may be input on one screen. In this case, a plurality of two-line character input
20 fields may be disposed on the displaying portion 104.

The user inputs characters with reference to a keyboard displayed in a lower region of the displaying portion 104 (the keyboard is hereinafter referred to as software keyboard). In Fig. 11, the
25 software keyboard is used to input Hiragana characters. With the software keyboard for Hiragana characters, when the user touches an icon "変換" in a lowest region

of the displaying portion, he or she can convert Hiragana characters into Kanji characters. As described above, Hiragana characters and Kanji characters that are input on the screen shown in Fig. 11 are recorded in sector 4 of the U-TOC area. In addition, when the user touches icons "かな (Hiragana characters)", "カタ (Katakana characters)", "記号 (Symbolic characters)", "英数大 (Uppercase alphabetic characters)", "コード (Codes)", or "英数小 (Lowercase alphabetic characters)" in a left region of the screen, he or she can select a desired character format.

Fig. 13 shows an example of a software keyboard displayed in the case that the user touches the icon "カタ" on the screen. The software keyboard shown in Fig. 13 is used to input Katakana characters in two-byte character format. Katakana characters in two-byte character format are recorded in sector 4 of the U-TOC area. On the other hand, Katakana characters in one-byte character format are recorded in sector 1 of the U-TOC area. Fig. 14 shows an example of a software keyboard displayed in the case that the user touches the icon "英数大" on the screen. Fig. 15 shows an example of a software keyboard displayed in the case that the user touches the icon "英数小" on the screen. Fig. 16 shows an example of a software keyboard displayed in the case that the user touches the icon "記号" on the screen. Uppercase alphabetic characters,

lowercase alphabetic characters, and symbolic characters are recorded in sector 1 of the U-TOC area.

In the above-described embodiment, characters are separately input to two lines of the character input field. When characters in a first character format are input to one line of the character input field, they may be automatically converted into equivalent characters in a second character format and then the characters in the second format may be input to the other line of the character input field. With reference to a flow chart shown in Fig. 17, this process will be described as a second embodiment of the present invention. The hardware structure of the second embodiment of the present invention is the same as that of the first embodiment of the present invention. In the following description, character information is input with a means similar to the remote controlling portion 100. However, the inputting means for character information may be the key portion of the MD main unit 30 or a personal computer.

In a character inputting process of the remote controlling portion 100 shown in Fig. 17, a character type is selected at step S1. When Hiragana has been selected, the flow advances to step S2. Otherwise, the flow advances to step S4. At step S2, when necessary, the Hiragana characters are converted into Kanji characters. The resultant characters are

input to an input column for character information to be recorded to sector 4 of the U-TOC area (this input column is hereinafter referred to as column A). At step A3, the Hiragana characters that have been input to the column A are automatically converted into Katakana characters in one-byte character format. The converted characters are input to an input-column for character information to be recorded in sector 1 of the U-TOC area (this input column is hereinafter referred to as column B).

At step S4, alphabetic characters, Katakana characters, or symbolic character are input. In this case, since it is not necessary to convert the input characters into Kanji characters, the input characters are directly input to the column A. At step S5, the input characters are converted into equivalent characters in one-byte character format and then input to the column B. In other words, at steps S3 and S5, characters that have been input to the column A at steps S2 and S4 are converted into equivalent characters in one-byte character format and then input to the column B, respectively.

At step S6, it is determined whether or not an object to be processed is an MD. When the object is an MD, the flow advances to step S7. Otherwise, the flow advances to step S11.

At step S7, it is determined whether or not a

command for transmitting the characters that have been input to the column A to the MD main unit has been input. When the command has been input, the characters that have been input to the column A are transmitted to the MD main unit along with a column A identifier and an MD identifier. Thereafter, the character input process is completed. When the command has not been input, the flow advances to step S9.

At step S9, it is determined whether or not a command for transmitting the characters that have been input to the column B to the MD main unit has been input. When the command has been input, the characters that have been input to the column B are transmitted to the MD main unit along with a column B ID and an MD ID. Thereafter, the character inputting process is completed. When the command has not been input, the character inputting process is terminated.

On the other hand, when the object to be processed is not an MD, a process for another unit such as a CD or a tuner is performed. In this case, the characters that have been input to the column A at step S11 are stored in the remote controller memory (see Fig. 8A) of the remote controlling portion 100. At step S12, it is determined whether or not a command for transmitting the characters that have been input to the column B to the MD main unit has been input. When the command has been input, the flow advances to step S13.

At step S13, the characters that have been input to the column B are transmitted to the MD main unit along with an ID of the selected unit. When the command has not been input, the character inputting process is
5 terminated.

When characters are input to the column A, equivalent characters thereto are input to the column
B. On the other hand, when characters are input to the column B at first, no characters have been input to the
10 column A. Thus, to prevent characters in both the columns A and B from being redundant (Hiragana characters (Kanji characters) or Katakana characters in one-byte character format), the user can input
characters to the column B at first. Alternatively,
15 when characters are input to the column B at first, equivalent characters thereto may be input to the column A.

Next, with reference to a flow chart shown in Fig. 18, a character writing process for an MD will be
20 described. After a signal is received from the remote controlling portion 100, at step S21, the unit ID contained in the received signal is determined. When the unit ID represents an MD, the flow advances to step S22. Otherwise, the flow advances to step S23.

25 At step S22, it is determined whether or not the received signal is character data that has been input to the column A corresponding to the A/B column

ID. When the received signal is character data that has been input to the column A, the flow advances to step S24. Otherwise, the flow advances to step S25. At step S24, the character data that has been input to the column A is written to sector 4 of the U-TOC area of the MD. Thus, the character writing process for the MD is completed.

At step S25, it is determined whether or not the received signal is character data that has been input to the column B corresponding to the A/B column ID. When the received signal is character data that has been input to the column B, the flow advances to step S26. At step S26, the character data that has been input to the column B is written to sector 1 of the U-TOC area of the MD. When the received signal is not character data that has been input to the column B, the character writing process for the MD is completed.

When the unit ID does not represent an MD at step S23, the selected unit is determined corresponding to the unit ID. Thereafter, the flow advances to step S27. At step S27, the character data that has been input to the column B is written to a predetermined memory of the MD main unit (this memory is referred to as main unit memory). Thus, the character writing process for the selected unit other than the MD is completed.

In the first and second embodiments of the

present invention, characters can be input in two types of formats corresponding to sectors 1 and 4 of the U-TOC area. Alternatively, by changing or expanding the structure of the U-TOC area, characters in three or
5 more formats may be input. For example, in addition to languages such as Japanese, Korean, Arabian, and so forth, phonetic characters that represent pronunciation of such languages may be denoted by alphabetic characters.

10 As a plurality of character formats, besides a combination of Japanese and English, a desired combination of languages (such as a combination of English and Spanish, a combination of German and French, or a combination of Chinese and Japanese) may
15 be used. Alternatively, a combination of different fonts may be used.

In the embodiments of the present invention, characters in different language formats are input in a two-line character input field. In addition, a
20 plurality of character formats of the same language (for example, Kanji characters, Hiragana characters, and Katakana characters) are input. Alternatively, with a character input field having three or more lines, a plurality of language formats or a plurality
25 of character formats may be input in the character input field having three or more lines.

The present invention can be applied to a

recording apparatus and a reproducing apparatus that record/reproduce digital video data as well as digital audio data. In addition, the present invention can be applied to a recording apparatus and a reproducing apparatus that use a record medium such as a tape shaped record medium or a semiconductor memory.

As described above, in the recording/reproducing apparatus that records/reproduces a digital audio signal (such as an MD apparatus) according to the present invention, character data such as titles of individual programs in a plurality of character formats such as Hiragana characters, Kanji characters, and alphabetic characters that are recorded in different sectors of the U-TOC area can be input on the same screen of a remote controlling portion or the like.

Thus, since the user can see input characters in a plurality of character formats, after confirming the relation therebetween, he or she can transmit character data to be recorded to a record medium to the apparatus. Thus, the user can easily and securely input character data such as titles of programs in a plurality of character formats (for example, alphabetic characters and equivalent Katakana characters).

Although the present invention has been shown and described with respect to a best mode embodiment thereof, it should be understood by those skilled in

the art that the foregoing and various other changes, omissions, and additions in the form and detail thereof may be made therein without departing from the spirit and scope of the present invention.

CLAIMS

1. A digital signal recording apparatus,
comprising:

5 recording means for rewriting programs and character
symbols recorded on a record medium having a program area
for recording programs and a management area for managing
a plurality of character symbols corresponding to the
programs;

10 operating means for allowing the plurality of
character symbols to be input when the character symbols
are rewritten by said recording means;

displaying means having a display field
corresponding to the plurality of character symbols that
15 are input by said operating means; and

controlling means for causing said recording means
to record the plurality of character symbols that are
input by said operating means to the management area in
such a manner that the plurality of character symbols
20 correlate with the programs.

2. A digital signal recording apparatus as set
forth in claim 1, wherein said controlling means has
means for automatically converting a character symbol
25 that is input by said operating means into another
character symbol of the plurality of character symbols.

3. A digital signal recording apparatus as set forth in claim 1 or 2, wherein said controlling means has means for causing said recording means to rewrite each of the plurality of character symbols displayed on said
5 displaying means.

4. A digital signal recording apparatus as set forth in any one of the preceding claims, wherein said displaying means displays at least a title of the record
10 medium.

5. A digital signal recording apparatus as set forth in any one of the preceding claims, wherein said displaying means displays at least a title of each
15 program recorded on the record medium.

6. A digital signal recording apparatus as set forth in any one of the preceding claims, wherein said displaying means displays at least an artist name of the
20 record medium.

7. A digital signal recording apparatus as set forth in any one of the preceding claims, wherein the character symbols displayed on said displaying means are
25 character symbols in different language formats.

8. A digital signal recording apparatus as set forth in any one of the preceding claims, wherein the character symbols displayed on said displaying means are character symbols in different character formats of the same language format.

9. A digital signal recording apparatus as set forth in any one of the preceding claims, wherein the record medium is a rewritable magnetic optical disc, and the management area is sector 1 and sector 4 of a U-TOC (User Table Of Content) area of the rewritable magnetic optical disc.

10. A digital signal reproducing apparatus, comprising:
reproducing means for reproducing programs and character symbols from a record medium having a program area for recording programs and a management area for managing a plurality of character symbols corresponding to the programs;
storing means for storing the plurality of character symbols in such a manner that the plurality of character symbols correlate with the programs; and
displaying means having a display field corresponding to the plurality of character symbols

that are recorded to said recording means.

11. A digital signal reproducing apparatus as set forth in claim 10, further comprising operating means for causing said reproducing means to reproduce programs corresponding to character symbols displayed on said displaying means.

12. A digital signal reproducing apparatus as set forth in claim 10 or 11, wherein said displaying means displays at least a title of the record medium.

13. A digital signal reproducing apparatus as set forth in any of claims 10 to 12, wherein said displaying means displays at least a title of each program recorded on the record medium.

14. A digital signal reproducing apparatus as set forth in any one of claims 10 to 13, wherein said displaying means displays at least an artist name of the record medium.

15. A digital signal reproducing apparatus as set forth in any one of claims 10 to 14, wherein the character symbols displayed on said displaying means are character symbols in different language formats.

16. A digital signal reproducing apparatus as set forth in any one of claims 10 to 15, wherein the character symbols displayed on said displaying means are character symbols in different character formats of the same language format.

17. A remote controlling apparatus, comprising:
operating means for inputting a plurality of character symbols that are transmitted to a unit to be controlled;

displaying means having a display field corresponding to the plurality of character symbols that are input by said operating means;

storing means for storing the plurality of character symbols that are input by said operating means; and

transmitting means for transmitting the plurality of character symbols stored in said storing means to the unit to be controlled along with an identifier that represents the unit to be controlled.

20

18. A remote controlling apparatus as set forth in claim 17, wherein

the unit to be controlled has:

receiving means for receiving the plurality of character symbols received from said transmitting means and the identifier;

identifying means for identifying the identifier
received by said receiving means; and

storing means for storing the plurality of character
5 symbols received by said receiving means, and

said storing means of the unit to be controlled
stores the plurality of character-symbols corresponding
to the identifier identified by said identifying means.

10 19. A remote controlling apparatus as set forth in
claim 17 or 18, further comprising controlling means for
automatically converting a character symbol that is input
by said operating means into another character symbol of
the plurality of character symbols.

15 20. A remote controlling apparatus as set forth in
claim any one of claims 17 to 19, wherein said
transmitting means transmits a command for causing the
unit to be controlled to reproduce a program
20 corresponding to a character symbol displayed by said
displaying means.

21. A remote controlling apparatus as set forth in
any one of claims 17 to 20, wherein said transmitting
25 means transmits a command for causing the unit to be
controlled to rewrite a character symbol corresponding to

each of the plurality of character symbols displayed on
said displaying means.

22. The remote controlling apparatus as set forth
5 in any one of claims 17 to 21, wherein said operating
means is character inputting means connected to the unit
to be controlled through a predetermined interface.

23. A remote controlling apparatus as set forth in
10 any one of claims 17 to 22, wherein said operating means
is a touch panel.

24. The remote controlling apparatus as set forth
in any one of claims 17 to 23, wherein said displaying
15 means displays at least a title of the record medium
loaded to the unit to be controlled.

25. A remote controlling apparatus as set forth in
any one of claims 17 to 24, wherein said displaying means
20 displays at least a title of each program recorded on the
record medium loaded to the unit to be controlled.

26. The remote controlling apparatus as set forth
in any one of claims 17 to 25 wherein said displaying
25 means displays at least an artist name of the record
medium loaded to the unit to be controlled.

27. A remote controlling apparatus as set forth in any one of claims 17 to 26, wherein the character symbols displayed on said displaying means are character symbols in different language formats.

5

28. A remote controlling apparatus as set forth in any one of claims 17 to 27, wherein the character symbols displayed on said displaying means are character symbols in different character formats of the same language format.

10

29. A digital signal recording method, comprising the steps of:

recording programs and character symbols to a record medium having a program area for recording programs and a management area for managing a plurality of character symbols corresponding to the programs;

15

inputting said plurality of character symbols; and displaying on a predetermined display field said plurality of character symbols that are input.

20

30. A digital signal reproducing method, comprising the steps of:

reproducing programs and character symbols from a record medium having a program area for recording programs and a management area for managing a plurality

25

of character symbols corresponding to the programs;

storing the plurality of character symbols in such a manner that the plurality of character symbols correlate with the programs; and

5 displaying the plurality of character symbols that are stored to a display field.

31. A digital signal recording apparatus constructed and arranged to operate substantially as
10 hereinbefore described with reference to the accompanying drawings.

32. A digital signal reproducing apparatus constructed and arranged to operate substantially as
15 hereinbefore described with reference to the accompanying drawings.

33. A remote controlling apparatus constructed and arranged to operate substantially as hereinbefore
20 described with reference to the accompanying drawings.

34. A digital signal recording method substantially as hereinbefore described with reference to the accompanying drawings.

25 35. A digital signal reproducing method substantially as hereinbefore described with reference to the accompanying drawings.



Application No: GB 9820013.2
Claims searched: 1-33

Examiner: Julyan Elbro
Date of search: 10 December 1998

Patents Act 1977 Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:
UK Cl (Ed.P): G4H (HF, HRBE), G5R (RHD, RHE, RHX, RJB, RB25, RB81)
Int Cl (Ed.6): G11B 27/32
Other: ONLINE: WPI JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage		Relevant to claims
Y	GB 2295474 A	FUJI see abstract	2, 19-28
X, Y	GB 2226902 A	SAMSUNG see abstract and fig. 2	X: 17, 18 Y: 19-28
Y	GB 2180973 A	SHARP see abstract	2, 19-28
Y	GB 2131583 A	SHARP see abstract	2, 19-28
X, Y	EP 0651383 A1	SONY see column 10 lines 31-36 and column 21 lines 24-34	X: 1, 3-16, 29, 30 Y: 2
X, Y	EP 0606157 A2	SONY see column 13 lines 15-32	X: 1, 3-16, 29, 30 Y: 2
X, Y	EP 0595358 A2	KENWOOD see column 2 lines 15-18	X: 1, 3-16, 29, 30 Y: 2
X, Y	EP 0262954 A2	PIONEER see abstract and fig. 8	X: 17, 18 Y: 19-28

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art
Y	Document indicating lack of inventive step if combined with one or more other documents of same category	P	Document published on or after the declared priority date but before the filing date of this invention
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application



Application No: GB 9820013.2
Claims searched: 1-33

Examiner: Julyan Elbro
Date of search: 10 December 1998

Category	Identity of document and relevant passage	Relevant to claims
X, Y	WO 95/12276 A1 TIME WARNER see page 2 lines 5 to 28	X: 1, 3-8, 10-16, 29, 30 Y: 2
X, Y	US 5666451 A DAEWOO see column 2 line 36 to column 3 line 4	X: 1, 3-8, 10-16, 29, 30 Y: 2

X Document indicating lack of novelty or inventive step	A Document indicating technological background and/or state of the art
Y Document indicating lack of inventive step if combined with one or more other documents of same category.	P Document published on or after the declared priority date but before the filing date of this invention.
& Member of the same patent family	E Patent document published on or after, but with priority date earlier than, the filing date of this application

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.